

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



Publication number: **0 677 961 A2**

**EUROPEAN PATENT APPLICATION**

Application number: **95300670.7**

Int. Cl.<sup>6</sup>: **H04N 5/926**

Date of filing: **02.02.95**

Priority: **13.04.94 JP 74863/94**  
**28.09.94 JP 233789/94**

Date of publication of application:  
**18.10.95 Bulletin 95/42**

Designated Contracting States:  
**DE FR GB NL**

Applicant: **KABUSHIKI KAISHA TOSHIBA**  
**72, Horikawa-cho,**  
**Saiwai-ku**  
**Kawasaki-shi,**  
**Kanagawa-ken 210,**  
**Tokyo (JP)**  
Applicant: **TOSHIBA AVE CO., LTD**  
**3-3-9, Shinbashi**  
**Minato-ku,**  
**Tokyo 105 (JP)**

Inventor: **Kikuchi, Shinichi, c/o Intellectual**  
**Property Div.**  
**K.K. Toshiba,**  
**1-1, Shibaura 1-chome,**  
**Minato-ku**

**Tokyo (JP)**  
Inventor: **Kitamura, Tetsuya, c/o Intellectual**  
**Property Div.**

**K.K. Toshiba,**  
**1-1, Shibaura 1-chome,**  
**Minato-ku**

**Tokyo (JP)**  
Inventor: **Mimura, Hideki, c/o Intellectual**  
**Property Div.**

**K.K. Toshiba,**  
**1-1, Shibaura 1-chome,**  
**Minato-ku**

**Tokyo (JP)**  
Inventor: **Taira, Kazuhiko, c/o Intellectual**  
**Property Div.**

**K.K. Toshiba,**  
**1-1, Shibaura 1-chome,**  
**Minato-ku**  
**Tokyo (JP)**

Representative: **Maury, Richard Philip**  
**MARKS & CLERK,**  
**57-60 Lincoln's Inn Fields**  
**London WC2A 3LS (GB)**


**Method for recording and reproducing data.**

A header for controlling each data block is disposed at the beginning of a data unit composed of a combination of video data, sound data, and sub-picture data. Header data is disposed at the beginning of each data block to control data in the data

block. Thus, in particular, when a plurality of channels of data and a plurality of streams of data are recorded in a data block and one of them is selected, each channel data and each stream data can be properly controlled.

EP 0 677 961 A2

FIG. 1

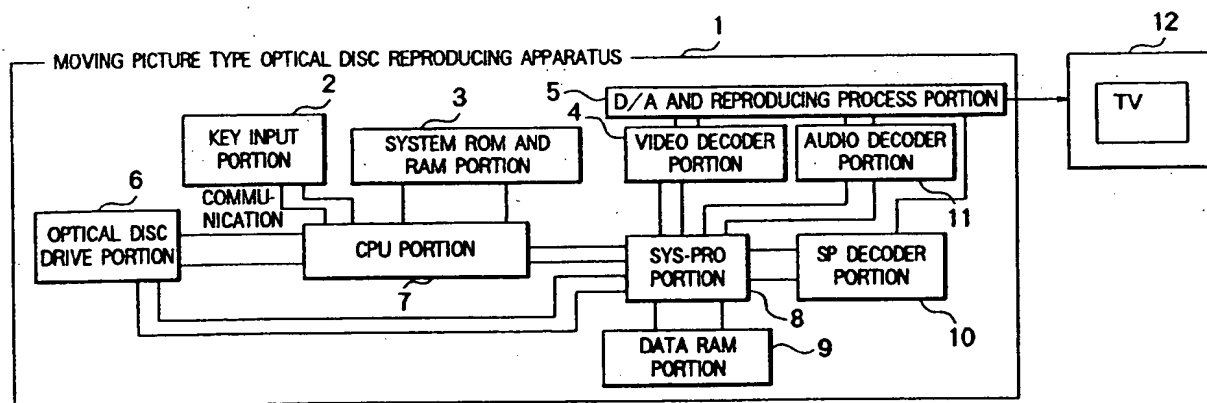

The present invention relates to a method for constructing data blocks of for example picture data and sound data as one data unit, an apparatus for reproducing the data block, and a method for reproducing the data block.

In recent years, a moving picture type optical disc reproducing apparatus for reproducing such as picture data and sound data from an optical disc has been developed. Such an apparatus has been widely used as for example movie reproducing apparatus and Karaoke reproducing apparatus. Recently, as a data compressing system for moving picture data, an MPEG (Moving Picture Image Coding Expert Group) system has been employed as an international standard. In the MPEG system, picture data is compressed with a variable length.

When a moving picture (main picture), sound, superimposed text (sub-picture), and so forth are recorded on a recording medium such as an optical disc, as shown in Fig. 42, each type of data is divided into minimum data units (hereinafter referred to as DUTs). At the beginning of a set of DUTs, a header that represents each DUT is provided. The length of each DUT is fixed. The length of each DUT of for example a CD-ROM is 2340 bytes.

However, when the length of the DUT is fixed, dummy data should be placed in DUTs so that the data amount of the main picture accords with the data amount of the sub-picture. Thus, the redundancy of the data inevitably increases. To prevent such a problem, a system for causing the reproducing time period of data of the DUT to be constant has been proposed.

However, when such a system is used, the following problems take place.

In this system, since each DUT has a different length, the header should have control information that represents at least the start position of each DUT and the relation between DUTs so that the reproducing apparatus can process the DUTs. Such information can be easily provided. In recent years, however, a system of which a plurality of channels of sound data and sub-picture data are recorded on an optical disc has been studied and thereby data of the DUTs has been finely constructed. Thus, information of the start position, relation, and so forth of each channel data in each DUT is also required. Thus, the conventional data group system cannot deal with such requirements.

When video data is compressed corresponding to the MPEG system, it is very difficult to divide video data by a predetermined time period. Next, this matter will be described.

Normally, compressed video data is generated in the following manner. As shown in Fig. 43, a picture film of 24 pictures per sec is converted into editing source data of 30 frames. Thereafter, the

source data is edited and compressed. Thus, two groups (GOP) of video data composed of 12 pictures are generated per second. One group of video data is one DUT video data. As an important matter, data generated from one frame of a film is compressed as a set because the variation thereof is small.

Thus, compressed video data including 15 frames of NTSC pictures is obtained per DUT (one GOP = 12 pictures).

However, depending on the editing method, compressed video data including 15 frames per GOP (12 pictures) may not be generated.

For example, as shown in Fig. 44, if 3T or later of a second editing source data of a picture film is cut and another editing source data generated from another picture film is connected thereto, after 2T and 2B are compressed and a second picture is generated, a third picture is composed of 3T and 3B. Thus, 12 pictures only contain 13 frames and one field as NTSC pictures.

In addition, as shown in Fig. 45, if video data is still picture or the like, after three frames (for example, 4B, 5T, and 5B) are edited, data is compressed and thereby 12 pictures are generated. Thus, in this case, the 12 pictures contain 17 frames of NTSC pictures.

Consequently, the number of frames contained in one GOP (12 pictures) varies in the range from 12 frames (minimum) to 18 frames (maximum). Thus, since the reproducing time period varies, data should be re-compressed so that the reproducing time period becomes constant. This operation should be performed for all data and thereby much labor is required.

To reduce such labor, a system that does not require that the reproducing time period of one DUT should be fixed has been proposed. However, in this system, there is a problem on the synchronization of main picture, sound, and sub-picture that are being reproduced.

In other words, to synchronize the reproduction of main picture, sound, and sub-picture under the condition of which the reproducing time period of each DUT is variable, the reproducing process of the sound and sub-picture should be properly controlled corresponding to the number of frames (reproducing time period) in the DUT to be reproduced. However, the number of frames is unknown until the compressed picture data is de-compressed. Thus, it is substantially difficult to synchronize the reproduction of the main picture, sound, and sub-picture.

The present invention is made from the above-described point of view. An object of the present invention is to provide a data unit constructing method, a data unit reproducing apparatus, and a data unit reproducing method, wherein a plurality of

data blocks such as main picture, sound, sub-picture, and so forth are treated as one data unit and wherein in particular, even if sound data and sub-picture data are set for a plurality of channels or a plurality of streams, they can be precisely and stably divided corresponding to a block header in the data blocks.

Another object of the present invention is to provide a data unit constructing method, a data unit reproducing apparatus, and a data unit reproducing method, wherein a plurality of data blocks such as main picture, sound, and sub-picture are treated as one data unit that is synchronously reproduced and wherein in particular, even if the number of display frames of the data unit of the main picture is variable, each data block can be precisely and stably synchronized at intervals of the frame display of the main picture.

To accomplish the above-described object, a first aspect of the present invention is a method for constructing a data unit having a plurality of types of data blocks, the data unit comprising a unit header disposed at the beginning of the data unit and adapted for controlling each of the data blocks as independent data of the data unit, and a block header disposed at the beginning of at least one of the data blocks and adapted for controlling data of the data block.

A second aspect of the present invention is the method as set forth in the first aspect wherein at least one of the data blocks is divided into a plurality of groups of data, and wherein the block header of the data block has control information that represents divided positions of the groups of data of the data blocks.

A third aspect of the present invention is a reproducing apparatus for reproducing a data unit having a plurality of types of data blocks, the apparatus comprising an input means for inputting the data unit, a data unit dividing means for dividing the data unit into data blocks corresponding to a unit header disposed at the data unit that is input by the input means, a data block dividing means for dividing the data block into groups of data corresponding to the block header when the block header is disposed at the divided data blocks, and a reproducing control means for reproducing only a predetermined one of the groups divided by the data block dividing means.

A fourth aspect of the present invention is a method for reproducing a data unit having a plurality of types of data blocks, comprising the steps of inputting the data unit, dividing the data unit into data blocks corresponding to a unit header disposed at the data unit that is input by the input means, dividing the data block into groups of data corresponding to the block header when the block header is disposed at the divided data blocks, and

reproducing only a predetermined one of the groups divided by the data block dividing means.

A fifth aspect of the present invention is a method for constructing a data unit having a plurality of types of data blocks, the data unit having a block length equivalent to a predetermined reproducing time period that is variable in a predetermined range, the data unit comprising a unit header disposed at the beginning of the data unit and adapted for controlling each of the data blocks as independent data of the data unit, a main picture data block having picture stream data with the block length of the reproducing time period and a main picture block header that represents an effective block length of the picture stream data and the start position of the picture stream data of main picture data block, a sound data block having at least one sound stream data with the block length of the reproducing time period and a sound block header that represents the effective block length of the sound stream data and the start position of the sound stream data of the sound data block, and a sub-picture data block having at least one sub-picture channel data with the block length of the reproducing time period and a sub-picture block header that represents the effective data length of the sub-picture channel data and the start position of the sub-picture channel data block of the sub-picture block data.

A sixth aspect of the present invention is the method according to the fifth aspect, wherein the sound data block and the sub-picture data block are adjacently disposed, the effective block length thereof being fixed, the boundary of the sound data block and the sub-picture data block being variable in the range of the effective block length.

A seventh aspect of the present invention is the method according to the fifth aspect, wherein the data blocks of the data unit that are processed chronologically independent from other data blocks and disposed at predetermined intervals are disposed in a plurality of data units so as to process a set of the data blocks as one data block, and wherein the unit header of the data units has information that identifies the position of the data blocks of a predetermined data unit in the set of the data blocks.

An eighth aspect of the present invention is the method according to the fifth aspect, wherein the sound block header of the sound data block further includes stream position information and stream construction information, the stream position information being adapted for identifying the start point, size, and presence/absence of the sound stream data, the stream construction information being adapted for identifying the construction of sound stream data.

An ninth aspect of the present invention is the method according to the ninth aspect, wherein the sound stream data is a set of a plurality of frame data divided by a predetermined time unit, and wherein the stream construction information includes information that represents whether or not the pattern of each of the frame data of the sound stream data is the same.

A tenth aspect of the present invention is the method according to the fifth aspect, wherein the sub-picture block header of the sub-picture data block further includes channel position information and channel display control information, the channel position information is adapted for representing the start point, size, and presence/absence of each of the sub picture channel data, the channel display control information being adapted for identifying the display control state of each of the sub-picture channel data.

An eleventh aspect of the present invention is the method according to the tenth aspect, wherein the sub-picture channel display control information is adapted for identifying each of sub-picture channel data as the following display control modes that are an immediate display mode for displaying the sub-picture channel data of a particular data unit in the time period of the data unit, a data hold mode for displaying the sub-picture channel data of a particular data unit in the time period of another data unit with a designated start time, a hold data display mode for issuing information of the start of the display of the sub-picture channel data being held, and a display clear mode for issuing information of the clear of the sub-picture channel data being displayed.

A twelfth aspect of the present invention is the method according to the fifth aspect, wherein the unit header has identification information of a predetermined data unit, the identification information comprising a program number that represents a program of the predetermined data unit in a set of data units, a data unit number that represents a reproduction start time of the predetermined data unit in the program, and information that represents a physical start address of the predetermined data unit and a physical start address of another data unit spaced apart therefrom by  $\pm n$ .

A thirteenth aspect of the present invention is the method according to the twelfth aspect, wherein the physical start address of the other data unit spaced apart from the predetermined data unit by  $\pm n$  is represented by a relative sector number measured from the predetermined data unit or by a relative sector number measured from a boundary when the other data unit is not present in the boundary of the program.

A fourteenth aspect of the present invention is the method according to the fifth aspect, wherein

the unit header has reproducing control information necessary for reproducing a predetermined data unit, the reproducing control information including a program number of a program that can be reproduced as a next program.

A fifteenth aspect of the present invention is the method according to the fifth aspect, wherein the unit header has reproducing control information necessary for reproducing a predetermined data unit, the reproducing control information including an effect setting flag for providing an effect to picture data and sound data of the data unit.

A sixteenth aspect of the present invention is the method according to the fifth aspect, wherein the picture stream data of the main picture data block is composed of a group of a predetermined number of pictures compressed corresponding to MPEG system, the unit header further including the total number of frames of the main picture data block being reproduced and information that represents a display start frame number of a reference screen of the picture data.

A seventeenth aspect of the present invention is the method according to the fifth aspect, wherein the sub-picture data blocks are disposed in N data units (where N is any integer that is equal to or larger than 2), the unit header further including information that represents the total number of frames of the N data units of the main picture data blocks being reproduced and a display start frame number of a reference screen in the last one of the N data units.

An eighteenth aspect of the present invention is a reproducing apparatus for reproducing a data unit having a plurality of types of data blocks, comprising a frame number counting means for counting a reproduced frame number of a main picture corresponding to a reproduced output signal of the main picture, a reproducing process means for inputting the reproduced frame number that is output from the frame number counting means and reproducing sound data or sub-picture data in synchronization with the reproduction of the main picture corresponding to the reproduced frame number, a first comparing means for comparing the reproduced frame number obtained by the frame number counting means with the total number of frames of the main picture data block read from a unit header and resetting the frame number counting means when the reproduced frame number and the total number of frames match, a reference screen detecting means for detecting the start of the reproduction of the reference screen corresponding to the reproduced data of the main picture, a second comparing means for comparing the reproduced frame number obtained by the frame number counting means with a display start frame number of the reference screen

that is read from the unit header when the start of the reproduction of the reference screen is detected by the reference screen detecting means, a down-counting means for counting down the difference between the reproduced frame number and the display start frame number of the reference screen at intervals of the frame display when the reproduced frame number is larger than the display start frame number of the reference screen, a storing means for storing reproduced data of a sub-picture of one frame prior, a switching means for switching reproduced data between sub-picture of one frame prior stored in the storing means and sub-picture of the present frame, and a means for controlling the switching means to select the reproduced data of the sub-picture stored in the storing means and stop the counting operation of the frame number counting means when the difference held by the down-counting means is other than 0.

A nineteenth aspect of the present invention is the reproducing apparatus according to the eighteenth aspect, wherein the reproducing process means comprises a decoding means for decoding sound data or sub-picture data and obtaining a sound output or a sub-picture output, and a buffer means for storing pre-decoded sub-picture data of the present frame, wherein the storing means is adapted for storing predecoded sub-picture data of one frame prior, and wherein the switching means is adapted for selecting sub-picture data stored in the storing means and outputting the selected sub-picture data to the decoding means when the difference counted by the down-counting means is other than 0 and for selecting sub-picture data of the present frame and outputting the selected data to the decoding means when the difference counted by the down-counting means is 0.

A twentieth aspect of the present invention is the reproducing apparatus according to the eighteenth aspect, wherein the reproducing process means has decoding means for decoding sound data or sub-picture data and outputting decoded sound or decoded sub-picture, wherein the storing means is adapted for storing reproduced sub-picture data of one frame prior obtained by the decoding means, and wherein the switching means is adapted for selecting sub-picture data stored in the storing means and outputting the selected sub-picture data when the difference counted by the down-counting means is other than 0 and for selecting sub-picture data of the present frame that is output from the decoding means and outputting the selected data when the difference counted by the down-counting means is 0.

A twenty-first aspect of the present invention is the reproducing apparatus according to the eighteenth aspect, the apparatus further comprising a reproduction controlling process means for deter-

mining whether or not a sub-picture reproduction controlling process is present between a reproducing start frame of the reference screen and a reproduced frame obtained by the frame number counting means when the display start frame number of the reference screen is larger than the reproduced frame obtained by the frame number counting means corresponding to the compared result of the second comparing means, a reproducing process forcing means for forcedly performing the reproducing control process when it is determined that there is the reproduced control process, and a setting the reproduced start frame number of the reference screen to the frame number counting means after the reproducing control process is completed.

According to the present invention, since a block header is provided at the beginning of a data block so as to control data in the data block, the data in the data block can be easily controlled in smaller units such as channels and streams corresponding to the block header.

According to the present invention, since a block header including control information that represents divided positions of data of groups in a data block is provided at the beginning of the data block, data of each group in the data block can be divided corresponding to the control information.

According to the present invention, since a block header that represents valid block length and start position of data of independent units (stream units and channel units) is provided in a main picture data block, a sound data block, and a sub-picture data block, data of each block can be easily and precisely controlled corresponding to the block header.

According to the present invention, since the boundary of a sound data block and a sub-picture data block is variable in the range of the maximum block length of a combination of a sound data block and a sub-picture data block that are adjacently disposed, if necessary, the sound data block can be extended for improving the sound data. Alternatively, the block length of the sub-picture data can be extended so as to increase information amount of superimposed text.

According to the present invention, since a unit header in a data unit has information that identifies a data block number included therein, when a plurality of data blocks in the data unit are processed chronologically independent from other data blocks and disposed at predetermined intervals, the data blocks can be processed in a plurality of data units so that they can be processed as one data block.

According to the present invention, start point, size, and presence/absence of each sound stream data in a data unit can be identified corresponding

to stream position information of a sound block header. In addition, the construction of each sound stream data can be identified corresponding to the stream construction information.

According to the present invention, since information that represents that the pattern of each frame data is the same is provided as stream construction information, it is not necessary to continuously record and reproduce the same frame data.

According to the present invention, the start point, size, and presence/absence of each sub-picture channel data in a data unit can be identified corresponding to channel position information of a sub-picture block. In addition, the content of the display control of the sub-picture channel data can be identified as categories such as immediate display mode, data hold mode, hold data display mode, display clear mode, and so forth as in claim 10 corresponding to the channel display control information.

According to the present invention, for a program that is composed of a set of data units, a program that includes a particular data unit, reproducing start time of the particular data unit in the program, a physical start address of the particular data unit, and a physical start address of another data unit spaced apart from the particular data unit by  $\pm n$  can be identified.

According to the present invention, a physical start address of a data unit spaced apart from a particular data unit by  $\pm n$  is represented by a relative sector number measured from the particular data unit. When a data unit spaced apart from a particular data unit by  $\pm n$  is not present in the boundary of data, the physical start address is represented by a relative sector to the boundary. Thus, even if a data unit spaced apart from a particular data unit for  $\pm n$  is not present in the boundary, a branch process and a termination process can be preformed.

According to the present invention, a program number of a program that can be successively reproduced after a program including a data unit can be identified.

According to the present invention, an external effect process can be performed for each data unit corresponding to an effect setting flag.

According to the present invention, when the number of frames reproduced from main picture data for each data unit (namely, reproducing time period is variable for each data unit), the reproduction of main picture, sound, and sub-picture can be synchronized.

According to the present invention, when a sub-picture data block is disposed in N data units (where N is an integer that is equal to or larger than 2), the reproduction of main picture, sound,

and sub-picture can be synchronized.

These and other objects, features and advantages of the present invention will become more apparent in light of the following detailed description of a best mode embodiment thereof, as illustrated in the accompanying drawings.

Fig. 1 is a block diagram showing the construction of a moving picture type optical disc reproducing apparatus according to an embodiment of the present invention;

Fig. 2 is a schematic diagram showing a data format of an optical disc reproduced by the optical disc reproducing apparatus of Fig. 1;

Fig. 3 is a schematic diagram showing the construction of a DUT;

Fig. 4 is a table showing the construction of a DUT header;

Fig. 5 is a table showing DUT construction identification information;

Fig. 6 is a block diagram showing the construction of a system processor (SYS-PRO) portion;

Fig. 7 is a schematic diagram showing a data dividing process block in an ARBX portion;

Fig. 8 is a timing chart showing the generation of a select signal for dividing DUT data into blocks;

Fig. 9 is a schematic diagram for explaining an variation of boundary of a sub-picture data block and an audio data block in the DUT;

Fig. 10 is a schematic diagram showing a non-interleave mode of sub-picture data;

Fig. 11 is a schematic diagram showing an interleave mode of sub-picture data;

Fig. 12 is a timing chart showing reproduction of sub-picture data in the non-interleave mode and the interleave mode;

Fig. 13 is a schematic diagram showing the construction of an audio data block;

Fig. 14 is a table showing the construction of an audio block header;

Fig. 15 is a schematic diagram showing invalid data in the audio data block;

Fig. 16 is a schematic diagram showing the construction of an audio stream;

Fig. 17 is a schematic diagram for explaining a reproducing process in a reduction mode of audio data;

Fig. 18 is a schematic diagram showing a sub-picture data block;

Fig. 19 is a table showing the construction of a sub-picture block header;

Fig. 20 is a table showing the construction of a sub-picture data header according to an embodiment of the present invention;

Fig. 21 is a schematic diagram for explaining a display control method of sub-picture data;

Fig. 22 is a table showing the construction of DUT identification and search information in a



DUT header;

Fig. 23 is a schematic diagram for explaining sector number information for high speed searching in the DUT header;

Fig. 24 is a flow chart showing steps of high speed searching corresponding to sector number information of Fig. 23;

Fig. 25 is a schematic diagram for explaining the operation in the case that no desired jump destination is present in high speed searching;

Fig. 26 is a table showing DUT reproduction control information in the DUT header;

Fig. 27 is a block diagram showing the construction of a non-continuous program detecting process block in an ARBX portion;

Fig. 28 is a schematic diagram for explaining a broken link process;

Fig. 29 is a block diagram showing the construction of an effect detecting block in the ARBX portion;

Fig. 30 is a schematic diagram for explaining the effect process;

Fig. 31 is a schematic diagram for explaining the construction of a video data block;

Fig. 32 is a table showing the construction of a video block header;

Fig. 33 is a table showing the construction of a video block;

Fig. 34 is a schematic diagram for explaining the total number of frames and an I picture display start frame number in the interleave mode;

Fig. 35 is a block diagram showing the construction of a frame number generating process block;

Fig. 36 is a block diagram showing the construction of a sub-picture reproducing portion in the process block of Fig. 35;

Fig. 37 is a flow chart showing a process sequence of the process block of Fig. 35;

Fig. 38 is a block diagram showing the construction of a sub-picture process portion of a frame number generating process block according to another embodiment of the present invention;

Fig. 39 is a flow chart showing a process sequence of the process block of Fig. 38;

Fig. 40 is a block diagram showing the construction of a process block in a picture reproducing portion in the case that  $K < J$  in a comparator of the process block of Fig. 35;

Fig. 41 is a flow chart showing a process sequence of the process block of Fig. 40;

Fig. 42 is a schematic diagram showing the data construction of a file of a conventional optical disc;

Fig. 43 is a schematic diagram for explaining an editing method of compressed video data;

Fig. 44 is a schematic diagram for explaining a data connecting method in editing compressed video data; and

Fig. 45 is a schematic diagram for explaining a method for compressing data of three frames so as to generate 12 pictures of data.

Next, with reference to the accompanying drawings, embodiments of the present invention will be described in detail.

Fig. 1 is a block diagram showing the construction of a moving picture type optical disc reproducing apparatus according to the present invention.

As shown in Fig. 1, the optical disc reproducing apparatus comprises a key input portion 2, a system ROM and RAM portion 3, a video decoder 4, a D/A and reproducing process portion 5, an optical disc drive portion 6, a CPU portion 7, a system processor portion (hereinafter referred to as SYS-PRO portion) 8, a data RAM portion 9, an SP (sub-picture) decoder portion 10, an audio decoder portion 11, and a TV portion 12. The key input portion 2 allows the user to input various commands such as reproduction, stop, fast forward, fast rewind, superimpose display, and so forth for the optical disc reproducing apparatus. The ROM of the system ROM and RAM portion 3 stores a control program (software) for controlling the operations of the apparatus. When the power of the apparatus is turned on, the control program is read to the CPU portion 7. The RAM of the system ROM and RAM portion 3 has a working region in which data is processed.

In the optical disc reproducing apparatus 1, the CPU portion 7 sends a desired address and a read command to the optical disc drive portion 6 corresponding to the key operation of the key input portion 2. The optical disc drive portion 6 reads data from the optical disc corresponding to the received command and sends the data to the SYS-PRO portion 8. The SYS-PRO portion 8 temporarily stores the data (digital data) in the data RAM portion 9 and divides the data into MPEG compressed moving picture data (hereinafter referred to as video data), sound data, sub-picture data, and so forth. In addition, the SYS-PRO portion 8 sends the video data to the video decoder portion 4, the sound data to the audio decoder portion 11, and the sub-picture data (for reproducing superimposed text and simple animation data) to the SP decoder portion 10. Each of the decoder portions 4, 10, and 11 decodes the input data and outputs the decoded data to the D/A and reproducing process portion 5. The D/A and reproducing process portion 5 converts the decoded digital signal into an analog signal and outputs the analog signal to the TV portion 12.

Fig. 2 is a schematic diagram showing the data format of the optical disc. Referring to Fig. 2, files

stored on the optical disc are hierarchically constructed. Each file accords with one story. One story is constructed of a plurality of programs. One program is constructed of a plurality of data units (hereinafter referred to as DUT). Since one program is constructed of a plurality of DUTs, the reproducing order of each program can be changed and each process can be branched. In addition, an effect process can be performed for each DUT. One DUT is composed of a DUT header HD, a sub-picture block data SP, an audio block data A, and a video block data V. The sub-picture block data, the audio block data, and the video block data are reproduced on the same time axis.

Fig. 3 is a schematic diagram showing the construction of the DUT of Fig. 2.

As shown in Fig. 3, the reproducing time period of one DUT can be varied in the range from 0.4 sec. to 0.8 sec. As shown in Fig. 2, the length of the DUT header HD is fixed. On the other hand, the length of each of the sub-picture data block SP, the audio data block A, and the video data block V is variable depending on the DUT reproducing time period, presence/absence of data compression, and the compressing system.

The DUT header contains various control information for each data block in the DUT. The sub-picture data block is composed of a plurality of sub-picture channels 1, 2, ..., and i and a sub-picture block header that contains control information for each channel data. The audio data block is composed of a plurality of audio streams 1, 2, ..., and j and an audio block header that contains control information for audio data of each stream. The video data block is composed of a video stream that is for example MPEG compressed moving picture data and a video block header that contains control information for the video stream.

Fig. 4 is a table showing the construction of the DUT header.

Referring to Fig. 4, the DUT header is composed of DUT identification and search information, DUT reproducing control information, DUT construction identification information, sub-picture block construction information, audio block construction information, video block construction information, reserved information, and so forth. When a file is generated, it is assumed that a read error of the DUT header takes place. To prevent the read error, each information is recorded on the disc four times.

Each of the sub-picture block construction information, audio block construction information, and video block construction information contains sector alignment information that represents sector numbers with which each data block starts and ends.

As shown in Fig. 5, the DUT construction identification information contains the divided point start address of each sub-picture data block (SPBSADR), its size (SPBSIZE), the divided point start address of each audio data block (ABSADR), its size (ABSIZE), the divided point start address of each video data block (VBSADR), its size (VBSIZE), and so forth. The divided point start address of each data block is represented by a relative address measured from the beginning of the DUT. The size of each address is represented by bytes.

Next, the construction of the SYS-PRO portion 8 of the optical disc reproducing apparatus of Fig. 1 will be described. Fig. 6 is a block diagram showing the construction of the SYS-PRO portion 8.

As shown in Fig. 6, the SYS-PRO portion 8 comprises a drive I/F portion 21, an ARBX portion 22, a HST I/F portion 23, a CACHPNT portion 24, an audio I/F portion 25, a DRAM control portion (DRAMC portion) 26, data select portions 27 and 29, a D-type flip-flop (DF) 28, and a video I/F portion 30.

The SYS-PRO portion 8 determines a sector alignment position corresponding to each block construction information of a DUT being read and performs a dividing process for each data block in the DUT. The video data block is sent to the video decoder portion 4. The sub-picture data block is sent to the SP decoder portion 10. The audio data block is sent to the audio decoder portion 11.

The ARBX portion 22 of the SYS-PRO portion 8 generates a data dividing signal for the dividing process. The data dividing signal is a select signal for dividing data blocks of the DUT corresponding to their types.

Fig. 7 is a block diagram showing the construction of a data dividing process block of the ARBX portion 22. Referring to Fig. 7, the data dividing process block comprises a drive I/F portion 37, an SPBSADR REG (SPBSADR register) 38, an SPBSIZE REG (SPBSIZE register) 39, an SP end address calculating address adder 40, a DUT data counter 41, an SP data start generating address comparator 42, a constant setting register 43 (transfer counter 73), an SPBSADR register load signal generating address comparator 44, a constant setting register 45 (transfer counter 74), an SPBSIZE register load signal generating address comparator 46, a constant setting register 47 (transfer counter 75), an SP data end generating address comparator 48, an ABSADR REG (ABSADR register) 49, an SP data select signal generating RS flip-flop (RS-F/F) 50, an ABSADR register load signal generating address comparator 51, a constant setting register 52 (transfer counter 76), an ABSIZE register load signal generating address

comparator 53, an audio data start generating address comparator 54, an ABSIZE REG (ABSIZE register) 55, an audio end address calculating address adder 56, an audio data start generating address comparator 57, a VBSADR REG (VBSADR register) 58, an audio data select signal generating RS flip-flop 59, a VBSADR register load signal generating address comparator 60, a constant setting register 61 (transfer counter 78), a VBSIZE register load signal generating address comparator 62, a video data start generating address comparator 63, a VBSIZE REG (VBSIZE register) 64, a video end address calculating address adder 65, a video data end generating address comparator 66, a video data select signal generating RS flip-flop 67, and a constant setting register 68 (transfer counter 77). It should be noted that when the DUT data counter 41 counts each transfer data 73 times, data is read to the constant setting register 43 (transfer counter 73). This operation applies to the other registers.

The SYS-PRO portion 8 reads the DUT header and records it to the data RAM 9 and stores the DUT construction identification information of the DUT header to each register of the ABRX portion 22. In addition, the SYS-PRO portion 8 performs the following processes corresponding to the DUT construction identification information.

As shown in Fig. 8, the drive I/F 37 sends the parameters (SPBSADR, SPBSIZE, ABSADR, ABSIZE, VBSADR, and VBSIZE) of the DUT construction identification information to each register while the transfer counter are counting from 72 to 78. The address comparators, the adders, and the flip-flops of the ABRX portion 22 generate each data dividing signal (data select signal).

When a signal for selecting sub-picture data (this signal is referred to as SP data select signal) is generated, the parameter SPBSADR is stored in the SPBSADR REG (register) 38 of the ABRX portion 22. The comparator 42 compares the value stored in the register 38 with the DUT data. When they match, a set signal "S" is sent to the flip-flop 50 (RS-F/F) 50. The parameter SPBSIZE is stored in the SPBSIZE REG (register) 39 of the ABRX portion 22. The adder 40 adds the value stored in the register 39 and the value stored in the SPBSADR REG 38. The comparator 48 compares the added result with the DUT data. When they match, a reset signal "R" is sent to the RS-F/F 50. The RS flip-flop 50 operates corresponding to the "S" and "R" signals and thereby generates the sub-picture a sub-picture data select signal. Likewise, an audio data select signal, a video data select signal, and so forth are generated.

The reproducing time period of a DUT can be varied in the range from 0.4 sec. to 0.8 sec. Thus, the entire block length can be varied. However, in

the optical disc reproducing apparatus, due to the restriction of hardware (for example, the amount of data reproduced from an optical disc per unit time period is restricted), the entire block length of each DUT is defined as its maximum amount.

From such a point of view, according to this embodiment, as shown in Fig. 9, the boundary (divided point) of the sub-picture data block and the audio data block can be varied in the range of the maximum block length thereof.

Thus, in a particular DUT, the block length of audio data can be extended so as to improve sound quality. In contrast, the block length of the sub-picture data can be extended so as to increase information amount of for example superimposed text. In addition, the region of the maximum block length of a combination of audio data and sub-picture data can be occupied by only the audio data block or the sub-picture data block.

The sub-picture data in the sub-picture data block is divided into channels that can be independently reproduced. A selected one of the channels is reproduced as sub-picture channel data.

The sub-picture data has two modes (that are non-interleave mode and interleave mode). As shown in Fig. 10, the non-interleave mode has up to 16 channels of sub-picture data in one DUT. On the other hand, as shown in Fig. 11, the interleave mode has up to 32 channels of sub-picture data in two successive DUTs that are equivalent to the reproducing time period of one second.

To identify the modes of the sub-picture data, according to this embodiment, as shown in Figs. 19 and 26, information that represents whether sub-picture data is in the interleave mode or non-interleave mode is recorded at the seventh and sixth bits of the SPSNO parameter of the DUT header. In addition, information that represents a DUT number of sub-picture data in the interleave mode is recorded at 0-th bit of the parameter.

In the interleave mode, since sub-picture data reproduced at the same reproducing time period is present in two DUTs, as shown in Fig. 12, the reproducing operation is performed after data of two DUTs (namely, data of 32 channels) have been prepared. Thus, the reproduction in the interleave mode has a delay for one DUT time period (namely, approximately 0.5 sec.) against that in the non-interleave mode.

The audio data in the audio data block is divided into streams that can be independently reproduced. Thus, a selected one of the streams is reproduced. Fig. 13 is a schematic diagram showing the construction of the audio data block. As shown in Fig. 13, an audio data block is composed of a plurality of audio streams and an audio block header. The audio block header is followed by the audio streams. As shown in Fig. 14, the audio block

header has an audio block identifier (ABID) that represents an audio data block. The audio block identifier (ABID) is recorded at the first byte of the audio block header. As shown in Fig. 15, the audio data block may have invalid data (as denoted by hatched region in Fig. 15). Thus, the audio block header contains an audio block size (ABSIZE), a synchronous pointer (AVSYNC), and stream data start address (AADRS\*). The audio block size (ABSIZE) represents the effective block length of the audio data block. The synchronous pointer (AVSYNC) synchronizes audio data with the main picture. The stream data start address (AADRS\*) is a relative address measured from the beginning of the audio data block. "" in AADRS\* represents a stream number that ranges from 0 to 8. When relative address = \$0000, AADRS\* represents "no stream data".

As shown in Fig. 16, each audio stream in the audio data block is divided into smaller units that are referred to as sound frames. When each of sound frames that compose one audio stream has the same data pattern, "1" is set to 31st bit C of the parameter AADRS\* shown in Fig. 14.

When the optical disc reproducing apparatus has determined the 31st bit C of the parameter AADRS\* is "1", the apparatus performs a reproducing process in a reduction mode. In the reduction mode, as shown in Fig. 17, one frame of a repeated data pattern is sent to the sound decoder and the decoded result is repeatedly output for the frames recorded at the 24th to 30th bits of the parameter AADRS\*. Thus, it is not necessary to repeatedly send the same data.

Fig. 18 is a schematic diagram showing the construction of the sub-picture data block. As shown in Fig. 18, the sub-picture data block is composed of a plurality of sub-picture channels and a sub-picture block header. The sub-picture block header is followed by the sub-picture channels. As shown in Fig. 19, a sub-picture block identifier (SPBID) that represents a sub-picture block is recorded at the first byte of the sub-picture block header. The sub-picture block header contains a sub-picture block size (SPBSIZE) and sub-picture channel data start address (SPADRC\*). The sub-picture block size (SPBSIZE) represents the effective block length of the sub-picture data block. The sub-picture channel data start address (SPADRC\*) is a relative address measured from the beginning of the sub-picture data block. "" of the parameter SPADRC\* is a channel number that ranges from 0 to 16.

Each sub-picture channel is composed of a channel header and a plurality of sub-picture display data frames. As shown in Fig. 20, the channel header contains a sub-picture display data start address (SPDDADR), a sub-picture control data

start address (SPCDADR), a sub-picture display start position (SPDSIZE), a sub-picture color information (SPCINFO), sub-picture edge compensating information (SPADJINFO), a mixed ratio of a sub-picture and a main picture (SPCOUNT), a sub-picture display start timing (SPDST), and so forth.

As shown in Fig. 19, a code that identifies a display control mode of the sub-picture channel data is set at the 31st to 28th bits of the start address (SPADRC\*). The 31st to 28th bits are denoted by "D", "W", "S", and "C", respectively. When D = 1, channel data is present. In this mode, a sub-picture is displayed as it is. This mode is referred to as an immediate display mode. When W = 1, although channel data is present, it is not displayed until S = 1. This mode is referred to as a data hold mode. When S = 1, data that is read in the condition of W = 1 is displayed. This mode is referred to as a hold data display mode. When C = 1, the sub-picture screen is cleared. This mode is referred to as a display clear mode. In this mode, a sub-picture screen is cleared rather than a moving picture screen.

Next, with reference to Fig. 21, sub-picture data display control method corresponding to D, W, S, and C will be described.

In Fig. 21, in DUT 10, D = 1, W = 0, S = 0, and C = 0. Since the mode of DUT 10 is in that "no first read" and "no screen clear", sub-picture data that is read from DUT 10 is reproduced as it is. In DUT 11, D = 0, W = 1, S = 0, and C = 0. The mode of DUT 11 is in that "first read of sub-picture data" and "no screen clear". Thus, the sub-picture data read from DUT 11 is not reproduced at this point, but reproduced when S = 1. Consequently, at this point, the sub-picture data of DUT 10 is displayed on the screen. In DUT 12 and DUT 13, D = 0, W = 0, S = 0, and C = 0. The mode of DUT 12 and DUT 13 is in that "no sub-picture data" and "no screen clear". Thus, sub-picture data is not read and the screen is held as it is. In DUT 14, D = 0, W = 0, S = 1, and C = 0. Thus, the mode of DUT 14 is in that "buffer data reproduction start" and "no screen clear". Consequently, according to a display frame number recorded in the sub-picture display start timing parameter (SPDST) of the channel header shown in Fig. 20, the sub-picture data read from DUT 11 is reproduced. In DUT 16, D = 0, W = 0, S = 0, and C = 1. Thus, the mode of DUT 16 is in that "no sub-picture data" and "screen clear". Consequently, the sub-picture display screen is cleared.

Fig. 22 is a table showing the construction of the DUT identification and search information in the DUT header. As shown in Fig. 22, the DUT identification and search information contains a DUT program number (PRGNO), a DUT serial number

(DUTNO), a DUT file start address (FSADRS), and so forth.

In addition, so as to easily perform a high speed searching operation, as shown in Fig. 23, the DUT identification and search information contains sectors numbers counted from the beginning of the DUT header. The sector numbers are 10 reproducing units forward (FWD10), five reproducing units forward (FWD5), one reproducing unit forward (FWD1), one reproducing unit backward (BWD1), five reproducing units backward (BWD5), and 10 reproducing units backward (BWD10). However, it should be noted that the reproducing units are continuous DUTs to be reproduced.

Thus, in the case that the high speed (forward) searching operation is performed, as shown in a flow chart of Fig. 24, when a forward key (>>) of the key input portion 2 is operated (pressed), the optical disc drive portion 6 drives the optical disc, reads DUT data from a desired file, and sends the read data to the SYS-PRO portion 8. When the SYS-PRO portion 8 receives the DUT data (at step S1), the CPU portion reads the sector number data in the high speed searching operation from the data RAM portion 9, calculates the next address (at step S2), and sends the address and the search command to the optical disc drive portion 6 (at step S3). Thus, the optical disc drive portion 6 reads the next DUT data and sends it to the SYS-PRO portion 8 (at step S4). Thus, the fast reproducing operation can be performed. This operation is continued while the fast forward key (>>) of the key input portion 2 is being pressed. When the fast forward key (>>) is released, the CPU portion 7 determines that the high speed searching operation is stopped (at step S5). The fast rewind operation is performed in the same manner as the high speed searching operation.

When the reproduction of DUTs is branched in the middle thereof or the reproduction of a file is completed, since there are no "" reproducing units forward and backward, the available sector number data is recorded. "" represents an integer such as 1, 5, or 10.

For example, as shown in Fig. 25, when a file is completed before branched to a DUT that is five reproducing units forward (FWD5) or 10 reproducing units forward (FWD10), assuming that DUT 19 is the start point, the sector number with which the file ends (such as DUT 22) is recorded as a DUT that is five reproducing units forward (FWD5) or 10 reproducing units forward (FWD10). The sector number represents the number of sectors counted from the beginning of the DUT header to a desired DUT.

Fig. 26 is a table showing DUT reproducing control information in the DUT header. As shown in Fig. 26, the DUT reproducing control information

has parameters that are a related program number (RPRGNO), a picture synchronous pointer (AV-SYNC), a sub-picture dividing number (SPSNO), a parental (PARENT), an edge effect (EFFECT), and so forth.

The related program number (RPRGNO) is a default program number that can be successively reproduced. When a program is not designated, the related program number (RPGNO) represents a next program to be reproduced.

When another program is successively reproduced, since the data is not continued, noise takes place in the sound and picture. To prevent this problem, as shown in Fig. 27, a non-continuous program detecting process block 78 is disposed in the ARBX portion 22.

Referring to Fig. 27, the non-continuous program detecting process block 78 comprises a drive I/F portion 69, a PRGNO register 70, a DUT data counter 71, a RPRGNO register 72, a constant setting register 73 (transfer counter 1), a PRGNO register load signal generating address comparator 74, a constant setting register 75 (transfer counter 65), a RPRGNO register load signal generating address comparator 76, and a broken link process flag signal generating comparator 77.

When a program other than a program designated corresponding to the DUT reproducing control information is reproduced, it is determined that the comparing process of one DUT prior is completed. The detected signal that is a latch signal is output to a D-type flip-flop (D-F/F) 86. Thus, the D-type flip-flop (D-F/F) 86 outputs a related program number of a DUT of one reproducing unit backward. On the other hand, a program number of a DUT that is being reproduced is read to the register 70. The D-type flip-flop (D-F/F) 86 compares the related program number of the DUT that is one reproducing unit backward with the program number of the program being reproduced. Thus, a broken link process enable flag signal is generated. After the above-determination, sound is muted for several frames and a process for smoothly switching moving picture data (namely, broken link process) is performed.

Next, a process sequence for which the broken link enable flag signal is generated will be described.

For example, as shown in Fig. 28, when programs are successively reproduced in the order of program "1" -> program "2" -> program "4" -> program "6", the program number (RPRGNO) in the program "1" becomes "2" and the program number (RPRGNO) in the program "2" becomes "4".

In the case that the program "2" is branched to the program "3" by the user operation, when the data of the program "3" is read, the just preceding

program is "4". Thus, the program "3" cannot be reproduced. In this situation, the broken link process flag signal becomes active.

The edge effect parameter (EFFECT) shown in Fig. 26 is information that represents the occurrence of the edge effect in picture data and sound data for each DUT.

Fig. 29 is a block diagram showing the construction of an effect detecting block 84 in the ARBX portion 22. Referring to Fig. 29, the effect detecting block 84 comprises a drive I/F portion 79, an effect register 80, a DUT data counter 81, a constant setting register 82 (transfer counter 71), and an effect register load signal generating address comparator 83. The effect detecting block 84 receives the edge effect parameter (EFFECT) from the DUT reproducing control information and thereby generates an effect process signal.

In this case, as shown in Fig. 30, when the EFFECT bit of for example DUT 21 is set, the effect flag becomes active and thereby the effect process signal is generated. When this signal is sent to the CPU portion 7, the video decoder portion 4, the audio decoder portion 11, the SP decoder portion 10, the D/A and reproducing process portion 5, an external device (such as lighting device or an air conditioner), and so forth, various edge effects can be obtained. In this embodiment, as shown in Fig. 30, the display screen can be faded out when a main picture is ended.

In addition, the effect process includes a fade-in process, lighting varying process that varies the brightness of an external lighting (for example, the external lighting is turned off in a climax scene of a horror story), control of external illumination, control of external air-conditioning facility (for example, the room temperature is lowered in a cold scene of a snow-covered mountain and raised in a hot scene of a desert), and sound effects of such as clapping of hands and putting in interlude.

Fig. 31 is a block diagram showing the construction of a video data block. As described above, the video data block is composed of a plurality of video streams and a video block header. The video data header is followed by the video streams. As shown in Fig. 32, the video block header includes a video block identifier (VBID), a video block size (VBSIZE), and so forth. The video block identifier (VBID) represents that the block is a video block. The video block size (VBSIZE) represents the effective block length of a video stream in the video data block.

As shown in Fig. 33, the video block construction information in the DUT header contains the start address of each video picture represented by a relative address (VADRF) measured from the beginning of the video data block. When the relative address = \$0000, the video block construction

information represents "no picture data". When the 31st bit C of the relative address VADRF is set to "1", the screen is cleared. In this case, only the main picture is cleared, rather than the sub-picture.

Since the DUT header has information that represents the start address of each video picture, high speed special reproducing operation such as double speed reproducing operation can be accomplished.

The sub-picture reproducing portion that performs the reproducing process for sub-picture data counts the VSYNC signal (vertical synchronous signal) that is input from the main picture decoder portion so as to synchronize the reproduction of the sub-picture with the reproduction of the main picture corresponding to the frame number of the main picture.

However, as described in the related art section of this document, the number of frames that are obtained as a result of decoding of one GOP (12 pictures) varies in the range from 12 to 18. Thus, the number of frames varies depending on each DUT. Consequently, when only the frame number of the main picture that is obtained by counting the VSYNC signal (vertical synchronous signal) is used, the last frame of each DUT cannot be determined. Thus, precise synchronization of main picture and sub-picture cannot be obtained.

Thus, in this embodiment, as shown in Fig. 26, as the DUT reproducing control information in the DUT header, a VFRAM parameter that represents the number of frames of a video data block to be reproduced and the display start frame number of an I picture that is a reference screen is provided. The display start frame number of the I picture is used to correct the deviation of the count of the reproduced frames due to an occurrence of an error. The display start frame number will be described later.

As described above, the sub-picture data has the non-interleave mode and the interleave mode shown in Figs. 10 to 12. In the interleave mode, since sub-picture data to be reproduced is a sub-picture channel that is selected from two successive DUTs, when the total number of reproducing frames and the I picture display start frame number are simply added to the DUT header, the reproduction of the video data cannot be correctly synchronized with the reproduction of the sub-picture data.

In this embodiment, as shown in Fig. 34, in the interleave mode, two successive DUTs are treated as one display group. The sum of the total number of reproducing frames of each of the two DUTs is recorded at the DUT header of each DUT. As the display start frame number of the I picture, the frame number of the I picture that is generated from the picture data of the second DUT is recorded. Thus, even if the sub-picture data is in the

interleave mode, the reproduction of the video data can be correctly synchronized with the reproduction of the sub-picture data.

Next, the construction of a frame number generating process block of the SYS-PRO 8 that is supplied to the sub-picture reproducing portion will be described. Fig. 35 is a block diagram showing the construction of the frame number generating process block. Fig. 36 is a block diagram showing the construction of a sub-picture reproducing portion of the process block. Fig. 37 is a flow chart showing the process sequence of the sub-picture image reproducing portion.

DUT data is input to the SYS-PRO portion 8 through a drive I/F portion 102. A DUT data counter 104 counts the number of DUTs being input. The count value is sent to a comparator 106. The comparator 106 compares the count value with the start address value of the VFRAME parameter of the DUT header stored in a register 105. When they match, the comparator 106 sends a load signal to a register 103 so as to retrieve the total number of reproduced frames (fifth to 0-th bits) and the display start frame number (seventh and sixth bits) of the I picture of the VFRAME parameter from the DUT data. The total number of reproduced frames (fifth to 0-th bits) are sent to a comparator 108 and the I picture display start frame number (seventh and sixth bits) are sent to a comparator 109.

On the other hand, the frame number counter portion 107 counts the frame number of the main picture that is being reproduced corresponding to the VSYNC signal (vertical synchronous signal) and the reproducing start signal that are received from the main picture decoder portion. The value of the frame number is supplied to a sub-picture reproducing portion 110 and the comparators 108 and 109.

The comparator 108 compares the total number of reproduced frames (fifth to 0-th bits) with the reproduced frame number of the main picture. When they match, the process block resets the frame number counter portion 107 and restarts counting the reproduced frame number.

Thus, even if the total number of frames of the main picture is variable, the correct reproduced frame number is supplied to the sub-picture reproducing portion 110.

However, in such a method, the reproduced frame number of the main picture may deviate due to an occurrence of an error. To prevent that, in this embodiment, the reproduced frame number is corrected in the following manner.

In other words, the comparator 109 compares the display start frame number (seventh and sixth bits) of the I picture contained in the VFRAME parameter with the reproduced frame number. The

comparison is performed when the I frame detecting signal (that is output when the main picture decoder determines that the I picture frames have been reproduced) is input. When there is a difference between these values, the reproduced frame number obtained by the frame number counter portion 107 deviates from the correct value for the difference. The difference is supplied to the sub-picture reproducing portion 110. The sub-picture reproducing portion 110 performs different processes depending to the difference between the reproduced frame number (hereinafter referred to as K) and the I picture display start frame number (hereinafter referred to as J). The reproduced frame number K is a frame number of which the I picture is reproduced. The I picture display start frame number J is a real frame number of which the I picture is reproduced.

When  $K = J$ , since the reproduced frame number has no deviation, no special process is performed.

When  $K > J$ , as shown in Figs. 36 and 37, the difference between K and J is set to a frame number difference counter portion 112 (at step S1). The sub-picture reproducing portion 110 causes a sub-picture data switching portion 116 to select sub-picture data of one frame prior that is stored in a reproduction process data storing portion 115 and to input it to a sub-picture decoder portion 116 (at step S2). The sub-picture data switching portion 116 switches the data input to the sub-picture decoder portion 14 from the sub-picture data of the present frame stored in the buffer memory 117 to the sub-picture data of one frame prior stored in the reproduction process data storing portion 115. When the difference between K and J is stored in the frame number difference counter portion 112, the data input to the sub-picture decoder portion 114 is switched from the buffer memory 117 to the reproduction process data storing portion 115. At this point, a count stop signal generating portion 113 generates a count stop signal and outputs it to the frame number counter portion 107. Thus, the frame number counter portion 107 stops the counting operation (at step S3).

Thereafter, the frame number difference counter portion 112 counts down to 0 at intervals of frame display (at step S4). When the count value becomes 0 (at step S5), the frame number difference counter portion 112 causes the sub-picture data switching portion 116 to switch the data input from the sub-picture decoder portion 14 to the buffer memory 117 (at step S6). Thus, the picture data can be reproduced for the frames of the difference between K and J.

Fig. 38 is a block diagram showing the construction of a sub-picture process portion of a frame number generating process block according

to another embodiment of the present invention. Fig. 39 is a flow chart showing the process sequence of the sub-picture process portion of Fig. 38.

In this embodiment, decoded sub-picture data of one frame prior is stored in the reproduction frame data storing portion 123.

When  $K > J$ , the sub-picture reproducing portion 210 sets the difference between  $K$  and  $J$  to a frame number difference counter portion 119 (at step S7). Thereafter, the sub-picture reproducing portion 210 causes a sub-picture data output switching portion 124 to select decoded sub-picture data of one frame prior that is stored in a reproduction frame data storing portion 123 and to output it (at step S8). The sub-picture data output switching portion 124 switches the output of the sub-picture from the decoded sub-picture data of the present frame received from the sub-picture decoder portion 122 to the decoded sub-picture data of one frame prior stored in the reproduction frame data storing portion 123. Thus, when the difference between  $K$  and  $J$  is stored in the frame number difference counter portion 119, the picture output is switched from the decoded sub-picture data of the present frame received from the sub-picture decoder portion 122 to the decoded sub-picture data of one frame prior stored in the reproduction frame data storing portion 123. At this point, the count stop signal generating portion 120 generates a count stop signal and outputs it to the frame number counter portion 107. Thus, the frame number counter portion 107 stops the counting operation (at step S9). Consequently, the picture being reproduced can be displayed for frames of the difference between  $K$  and  $J$ .

Thereafter, the frame number difference counter portion 112 counts down to 0 at intervals of frame display (at step S10). When the count value becomes 0 (at step S11), the frame number difference counter portion 119 causes the sub-picture data output switching portion 124 to switch the sub-picture output to the decoded sub-picture data of the present frame received from the sub-picture decoder portion 122 (at step S12).

Fig. 40 is a block diagram showing the construction of a process block of the picture reproducing portion in the case that the comparator 109 of the frame number generating process block outputs a compared result of  $K < J$ . Fig. 41 is a flow chart showing the process sequence of the block of Fig. 40.

When  $K < J$ , the difference between the value of a reproduced frame number ( $K$ ) of the I picture and the value of a display start frame number ( $J$ ) of the I picture and the value of a reproduced frame number are sent to the reproduction process detecting portion 126 (at step S13). Thereafter, the

reproduction process detecting portion 126 determines whether or not sub-picture data has been reproduced for frames  $K$  to  $J$  corresponding to pre-decoded sub-picture data stored in the buffer memory portion 128 (at steps S14 and S15). If the reproducing control has been performed, the reproduction process detecting portion 126 controls the sub-picture decoder portion 129 so as to forcibly reproduce sub-picture of a frame most close to the frame number of a main picture being reproduced (at step S16). Thereafter, the load signal generating portion 130 generates a load signal so as to load the display start frame number ( $J$ ) of the I picture to the frame number counter portion 107 (at step S17). Thus, the display of the frame number  $K$  is branched to the display of the frame number  $J$ .

As described above, according to the present invention, a plurality of data blocks such as main picture, sound, sub-picture, and so forth are treated as one data unit. In particular, even if sound data and sub-picture data are set for a plurality of channels or a plurality of streams, they can be precisely and stably divided corresponding to a block header in the data blocks.

In addition, according to the present invention, a plurality of data blocks such as main picture, sound, and sub-picture are treated as one data unit that is synchronously reproduced. In particular, even if the number of display frames of the data unit of the main picture is variable, each data block can be precisely and stably synchronized at intervals of the frame display of the main picture.

Although the present invention has been shown and described with respect to a best mode embodiment thereof, it should be understood by those skilled in the art that the foregoing and various other changes, omissions, and additions in the form and detail thereof may be made therein without departing from the spirit and scope of the present invention.

## Claims

1. A method for constructing a data unit having a plurality of types of data blocks, the data unit comprising:
  - a unit header disposed at the beginning of the data unit and adapted for controlling each of the data blocks as independent data of the data unit; and
  - a block header disposed at the beginning of at least one of the data blocks and adapted for controlling data of the data block.
2. The method as set forth in claim 1, wherein at least one of the data blocks is divided into a plurality of groups of data, and



wherein the block header of the data block has control information that represents divided positions of the groups of data of the data blocks.

3. A reproducing apparatus for reproducing a data unit having a plurality of types of data blocks, the apparatus comprising:

input means for inputting the data unit;

data unit dividing means for dividing the data unit into data blocks corresponding to a unit header disposed at the data unit that is input by said input means;

data block dividing means for dividing the data block into groups of data corresponding to the block header when the block header is disposed at the divided data blocks; and

reproducing control means for reproducing only a predetermined one of the groups divided by said data block dividing means.

4. A method for reproducing a data unit having a plurality of types of data blocks, comprising the steps of:

inputting the data unit;

dividing the data unit into data blocks corresponding to a unit header disposed at the data unit that is input by said input means;

dividing the data block into groups of data corresponding to the block header when the block header is disposed at the divided data blocks; and

reproducing only a predetermined one of the groups divided by said data block dividing means.

5. A method for constructing a data unit having a plurality of types of data blocks, the data unit having a block length equivalent to a predetermined reproducing time period that is variable in a predetermined range, the data unit comprising:

a unit header disposed at the beginning of the data unit and adapted for controlling each of the data blocks as independent data of the data unit;

a main picture data block having picture stream data with the block length of the reproducing time period and a main picture block header that represents an effective block length of the picture stream data and the start position of the picture stream data of main picture data block;

a sound data block having at least one sound stream data with the block length of the reproducing time period and a sound block header that represents the effective block length of the sound stream data and the start

position of the sound stream data of the sound data block; and

a sub-picture data block having at least one sub-picture channel data with the block length of the reproducing time period and a sub-picture block header that represents the effective data length of the sub-picture channel data and the start position of the sub-picture channel data block of the sub-picture block data.

6. The method as set forth in claim 5,

wherein the sound data block and the sub-picture data block are adjacently disposed, the effective block length thereof being fixed, the boundary of the sound data block and the sub-picture data block being variable in the range of the effective block length.

7. The method as set forth in claim 5,

wherein the data blocks of the data unit that are processed chronologically independent from other data blocks and disposed at predetermined intervals are disposed in a plurality of data units so as to process a set of the data blocks as one data block, and

wherein the unit header of the data units has information that identifies the position of the data blocks of a predetermined data unit in the set of the data blocks.

8. The method as set forth in claim 5,

wherein the sound block header of the sound data block further includes stream position information and stream construction information, the stream position information being adapted for identifying the start point, size, and presence/absence of the sound stream data, the stream construction information being adapted for identifying the construction of sound stream data.

9. The method as set forth in claim 9,

wherein the sound stream data is a set of a plurality of frame data divided by a predetermined time unit, and

wherein the stream construction information includes information that represents whether or not the pattern of each of the frame data of the sound stream data is the same.

10. The method as set forth in claim 5,

wherein the sub-picture block header of the sub-picture data block further includes channel position information and channel display control information, the channel position information is adapted for representing the start point, size, and presence/absence of each

of the sub picture channel data, the channel display control information being adapted for identifying the display control state of each of the sub-picture channel data.

11. The method as set forth in claim 10,

wherein the sub-picture channel display control information is adapted for identifying each of sub-picture channel data as the following display control modes:

an immediate display mode for displaying the sub-picture channel data of a particular data unit in the time period of the data unit;

a data hold mode for displaying the sub-picture channel data of a particular data unit in the time period of another data unit with a designated start time;

a hold data display mode for issuing information of the start of the display of the sub-picture channel data being held; and

a display clear mode for issuing information of the clear of the sub-picture channel data being displayed.

12. The method as set forth in claim 5,

wherein the unit header has identification information of a predetermined data unit, the identification information comprising:

a program number that represents a program of the predetermined data unit in a set of data units;

a data unit number that represents a reproduction start time of the predetermined data unit in the program; and

information that represents a physical start address of the predetermined data unit and a physical start address of another data unit spaced apart therefrom by  $\pm n$ .

13. The method as set forth in claim 12,

wherein the physical start address of the other data unit spaced apart from the predetermined data unit by  $\pm n$  is represented by a relative sector number measured from the predetermined data unit or by a relative sector number measured from a boundary when the other data unit is not present in the boundary of the program.

14. The method as set forth in claim 5,

wherein the unit header has reproducing control information necessary for reproducing a predetermined data unit, the reproducing control information including a program number of a program that can be reproduced as a next program.

15. The method as set forth in claim 5,

wherein the unit header has reproducing control information necessary for reproducing a predetermined data unit, the reproducing control information including an effect setting flag for providing an effect to picture data and sound data of the data unit.

16. The method as set forth in claim 5,

wherein the picture stream data of the main picture data block is composed of a group of a predetermined number of pictures compressed corresponding to MPEG system, the unit header further including the total number of frames of the main picture data block being reproduced and information that represents a display start frame number of a reference screen of the picture data.

17. The method as set forth in claim 5,

wherein the sub-picture data blocks are disposed in N data units (where N is any integer that is equal to or larger than 2), the unit header further including information that represents the total number of frames of the N data units of the main picture data blocks being reproduced and a display start frame number of a reference screen in the last one of the N data units.

18. A reproducing apparatus for reproducing a data unit having a plurality of types of data blocks, comprising:

frame number counting means for counting a reproduced frame number of a main picture corresponding to a reproduced output signal of the main picture;

reproducing process means for inputting the reproduced frame number that is output from said frame number counting means and reproducing sound data or sub-picture data in synchronization with the reproduction of the main picture corresponding to the reproduced frame number;

first comparing means for comparing the reproduced frame number obtained by said frame number counting means with the total number of frames of the main picture data block read from a unit header and resetting said frame number counting means when the reproduced frame number and the total number of frames match;

reference screen detecting means for detecting the start of the reproduction of the reference screen corresponding to the reproduced data of the main picture;

second comparing means for comparing the reproduced frame number obtained by said

frame number counting means with a display start frame number of the reference screen that is read from the unit header when the start of the reproduction of the reference screen is detected by said reference screen detecting means;

down-counting means for counting down the difference between the reproduced frame number and the display start frame number of the reference screen at intervals of the frame display when the reproduced frame number is larger than the display start frame number of the reference screen;

storing means for storing reproduced data of a sub-picture of one frame prior;

switching means for switching reproduced data between sub-picture of one frame prior stored in said storing means and sub-picture of the present frame; and

means for controlling said switching means to select the reproduced data of the sub-picture stored in said storing means and stop the counting operation of said frame number counting means when the difference held by said down-counting means is other than 0.

19. The reproducing apparatus as set forth in claim 18,

wherein said reproducing process means comprises:

decoding means for decoding sound data or sub-picture data and obtaining a sound output or a sub-picture output; and

buffer means for storing pre-decoded sub-picture data of the present frame,

wherein said storing means is adapted for storing pre-decoded sub-picture data of one frame prior; and

wherein said switching means is adapted for selecting sub-picture data stored in said storing means and outputting the selected sub-picture data to said decoding means when the difference counted by said down-counting means is other than 0 and for selecting sub-picture data of the present frame and outputting the selected data to said decoding means when the difference counted by said down-counting means is 0.

20. The reproducing apparatus as set forth in claim 18,

wherein said reproducing process means has decoding means for decoding sound data or sub-picture data and outputting decoded sound or decoded sub-picture,

wherein said storing means is adapted for storing reproduced sub-picture data of one frame prior obtained by said decoding means,

and

wherein said switching means is adapted for selecting sub-picture data stored in said storing means and outputting the selected sub-picture data when the difference counted by said down-counting means is other than 0 and for selecting sub-picture data of the present frame that is output from said decoding means and outputting the selected data when the difference counted by said down-counting means is 0.

21. The reproducing apparatus as set forth in claim 18, the apparatus further comprising:

reproduction controlling process means for determining whether or not a sub-picture reproduction controlling process is present between a reproducing start frame of the reference screen and a reproduced frame obtained by said frame number counting means when the display start frame number of the reference screen is larger than the reproduced frame obtained by said frame number counting means corresponding to the compared result of said second comparing means;

reproducing process forcing means for forcibly performing the reproducing control process when it is determined that there is the reproduced control process; and

setting the reproduced start frame number of the reference screen to said frame number counting means after said reproducing control process is completed.

FIG. 1

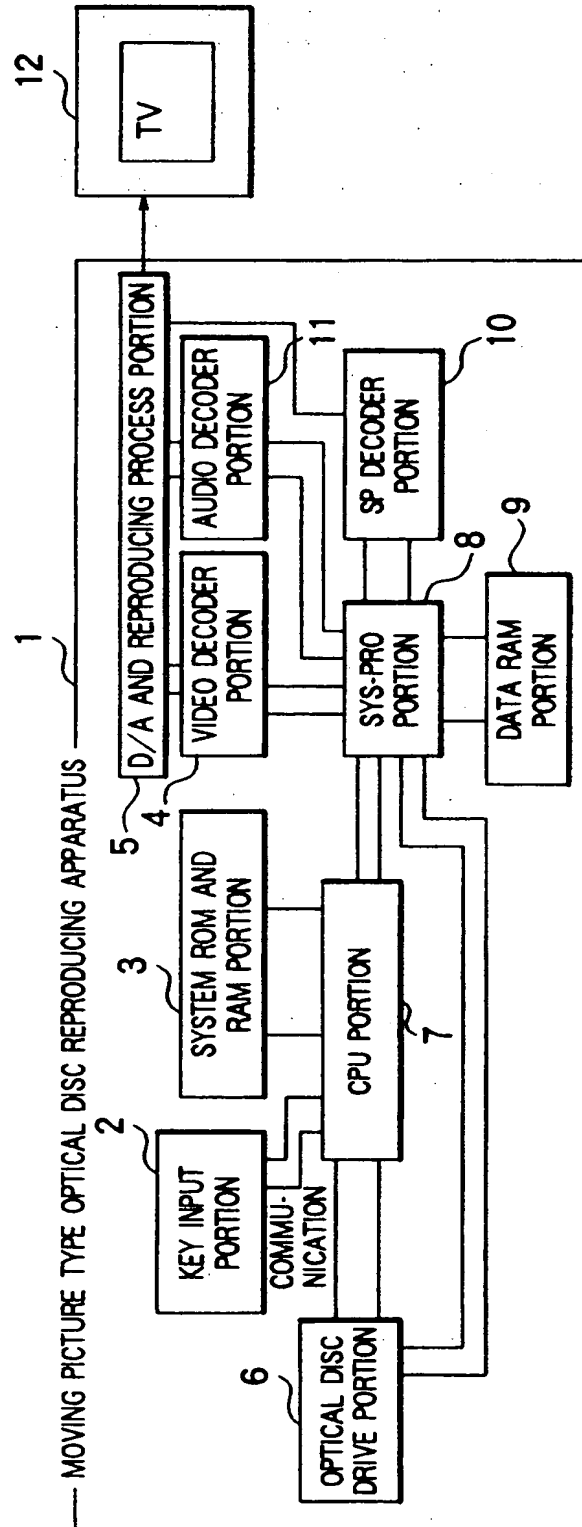


FIG. 2

1 FILE = 1 STORY

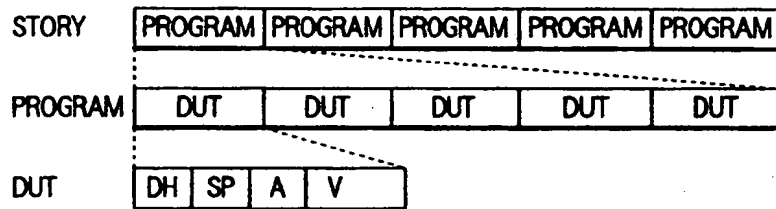


FIG. 3

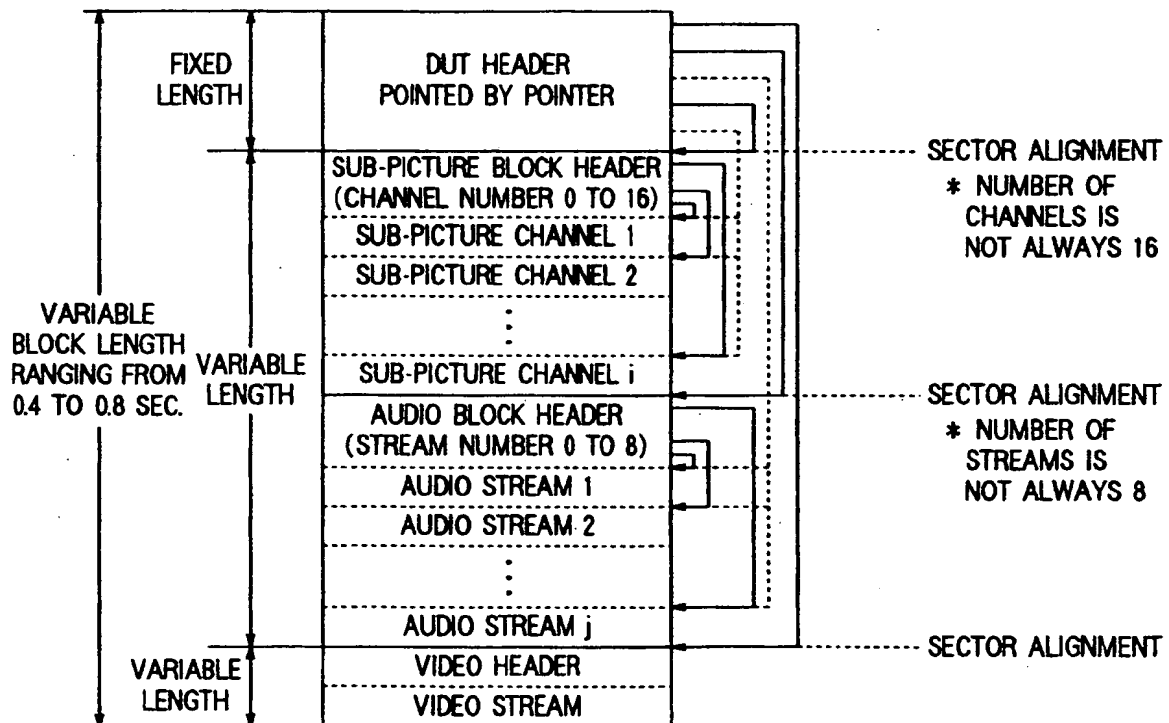


FIG. 4

ITEM	BYTES
DUT IDENTIFICATION AND SEARCH INFORMATION	64 BYTES
DUT REPRODUCTION CONTROL INFORMATION	8 BYTES
DUT CONSTRUCTION IDENTIFICATION INFORMATION	24 BYTES
SUB-PICTURE BLOCK CONSTRUCTION INFORMATION	64 BYTES
AUDIO BLOCK CONSTRUCTION INFORMATION	32 BYTES
VIDEO BLOCK CONSTRUCTION INFORMATION	60 BYTES
RESERVED	4 BYTES
TOTAL	256 BYTES

FIG. 5

PARAMETER	DESCRIPTION	BYTES
SPBSADR	DIVIDED POINT START ADDRESS OF SUB-PICTURE BLOCK : RELATIVE ADDRESS MEASURED FROM BEGINNING OF SUB-PICTURE BLOCK	4BYTES
SPBSIZE	SUB-PICTURES BLOCK SIZE : UNIT → BYTES	4BYTES
ABSADR	DIVIDED POINT START ADDRESS OF AUDIO BLOCK : RELATIVE ADDRESS MEASURED FROM BEGINNING OF DUT	4BYTES
ABSIZ	AUDIO BLOCK SIZE : UNIT → BYTES	4BYTES
VBSADR	DIVIDED POINT ADDRESS OF VIDEO BLOCK : RELATIVE ADDRESS MEASURED FROM BEGINNING OF DUT	4BYTES
VBSIZE	VIDEO BLOCK SIZE : UNIT → BYTE	4BYTES

FIG. 6

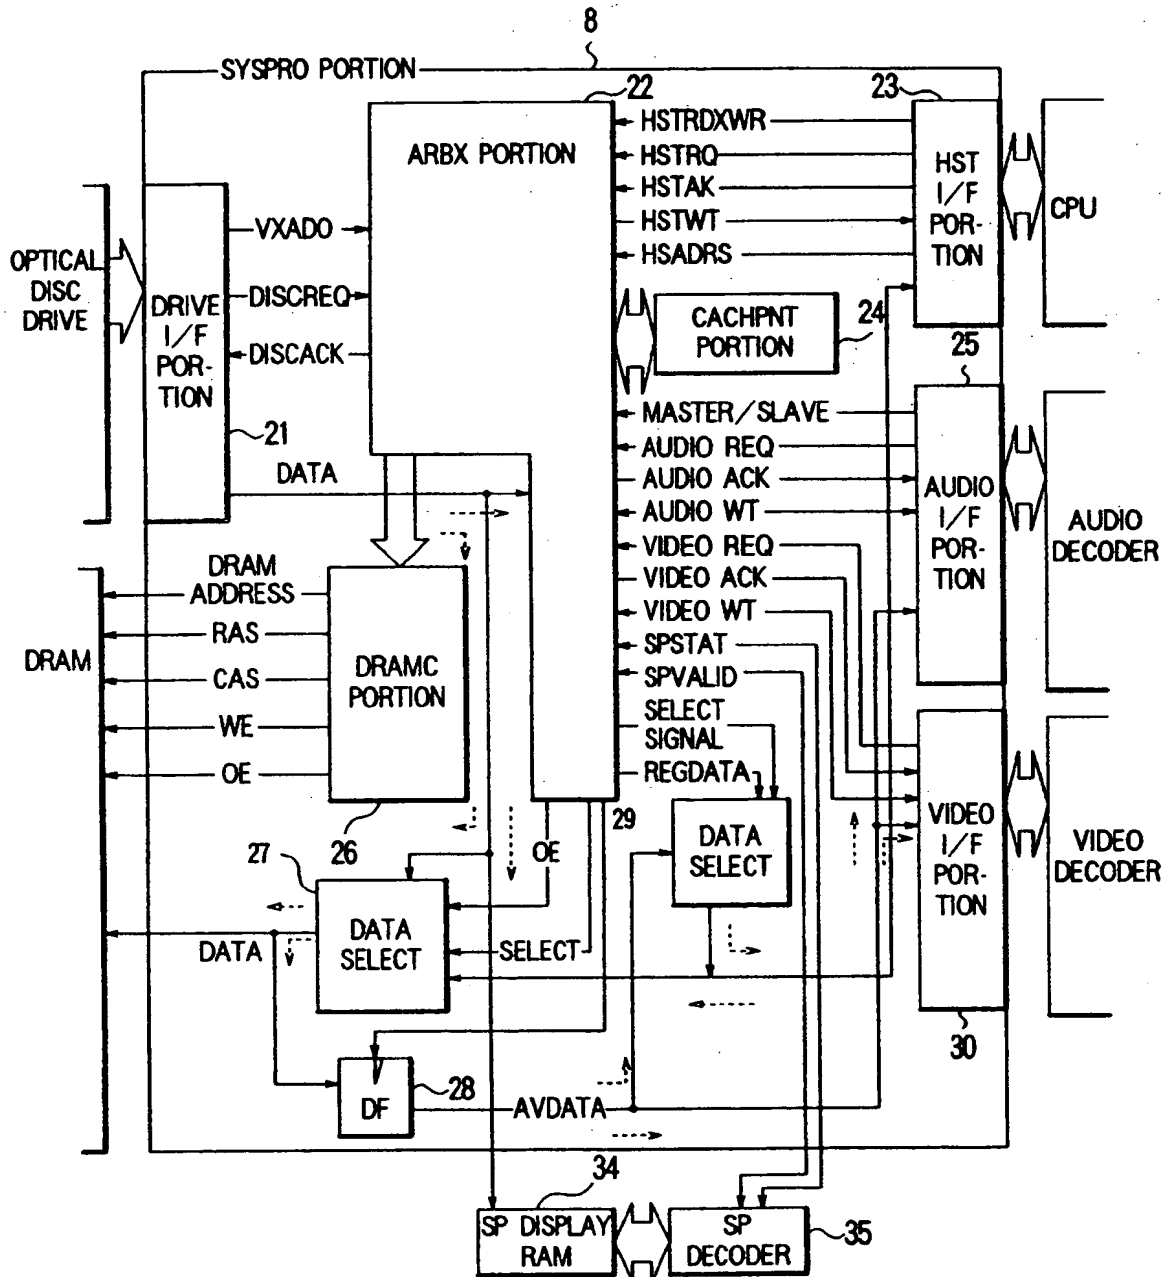


FIG. 7

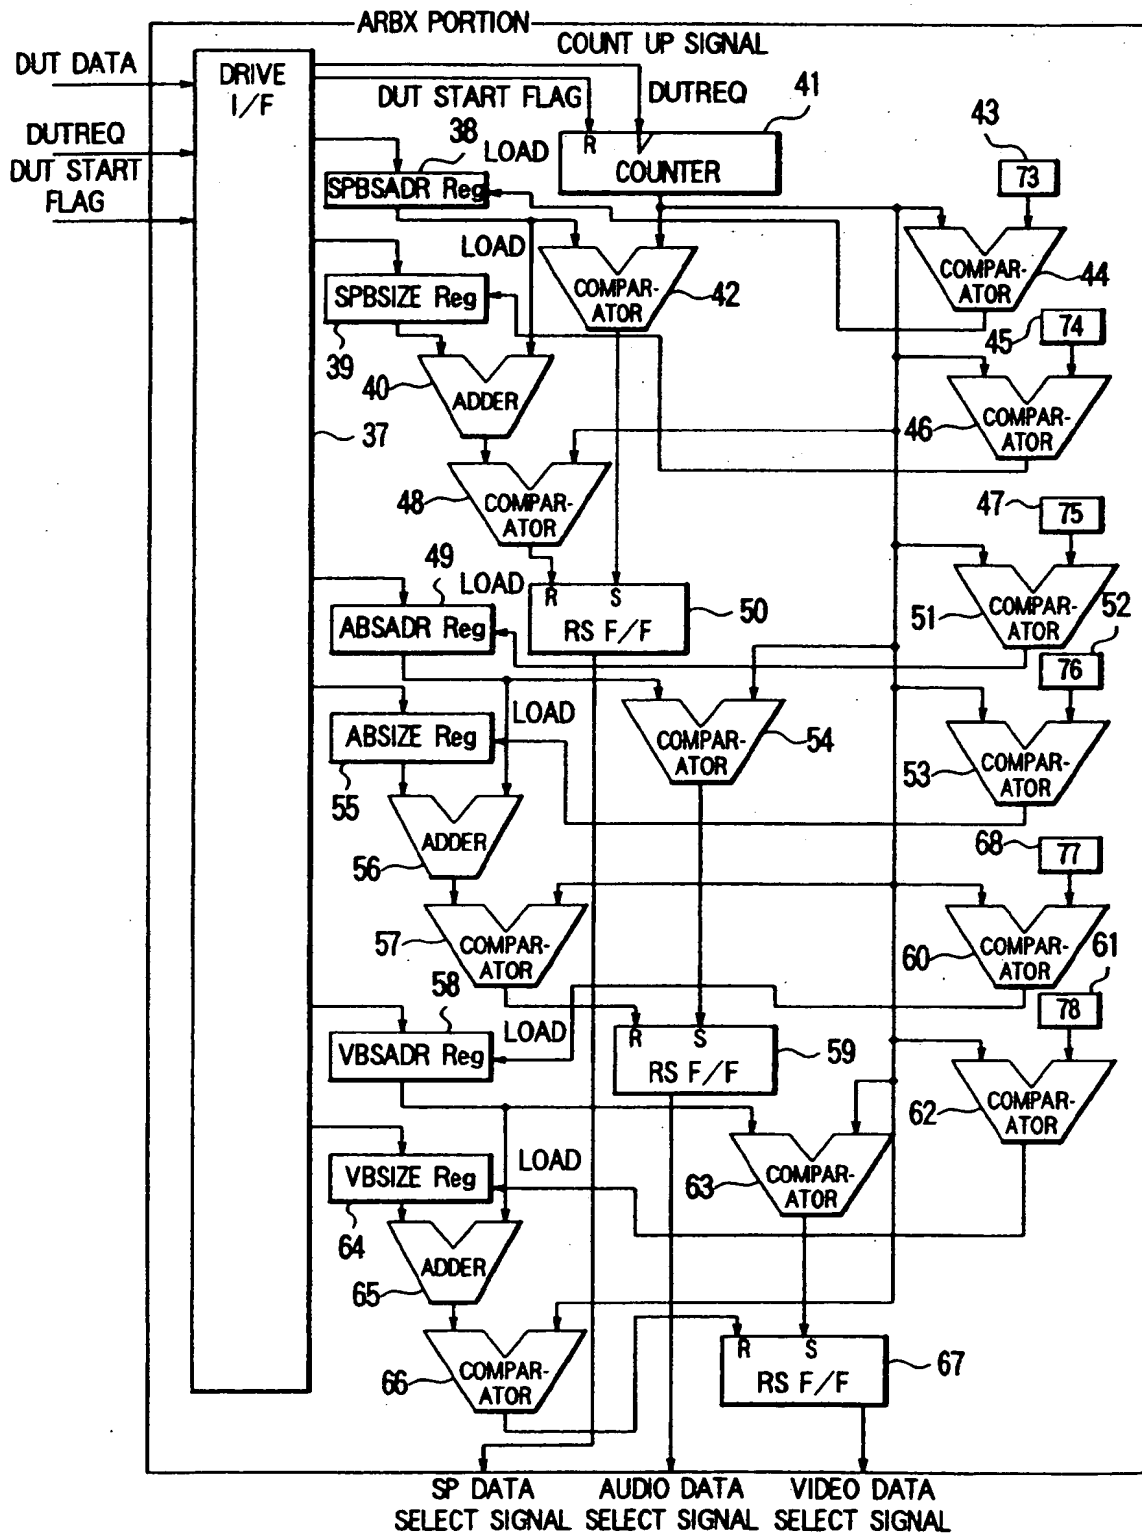




FIG. 8

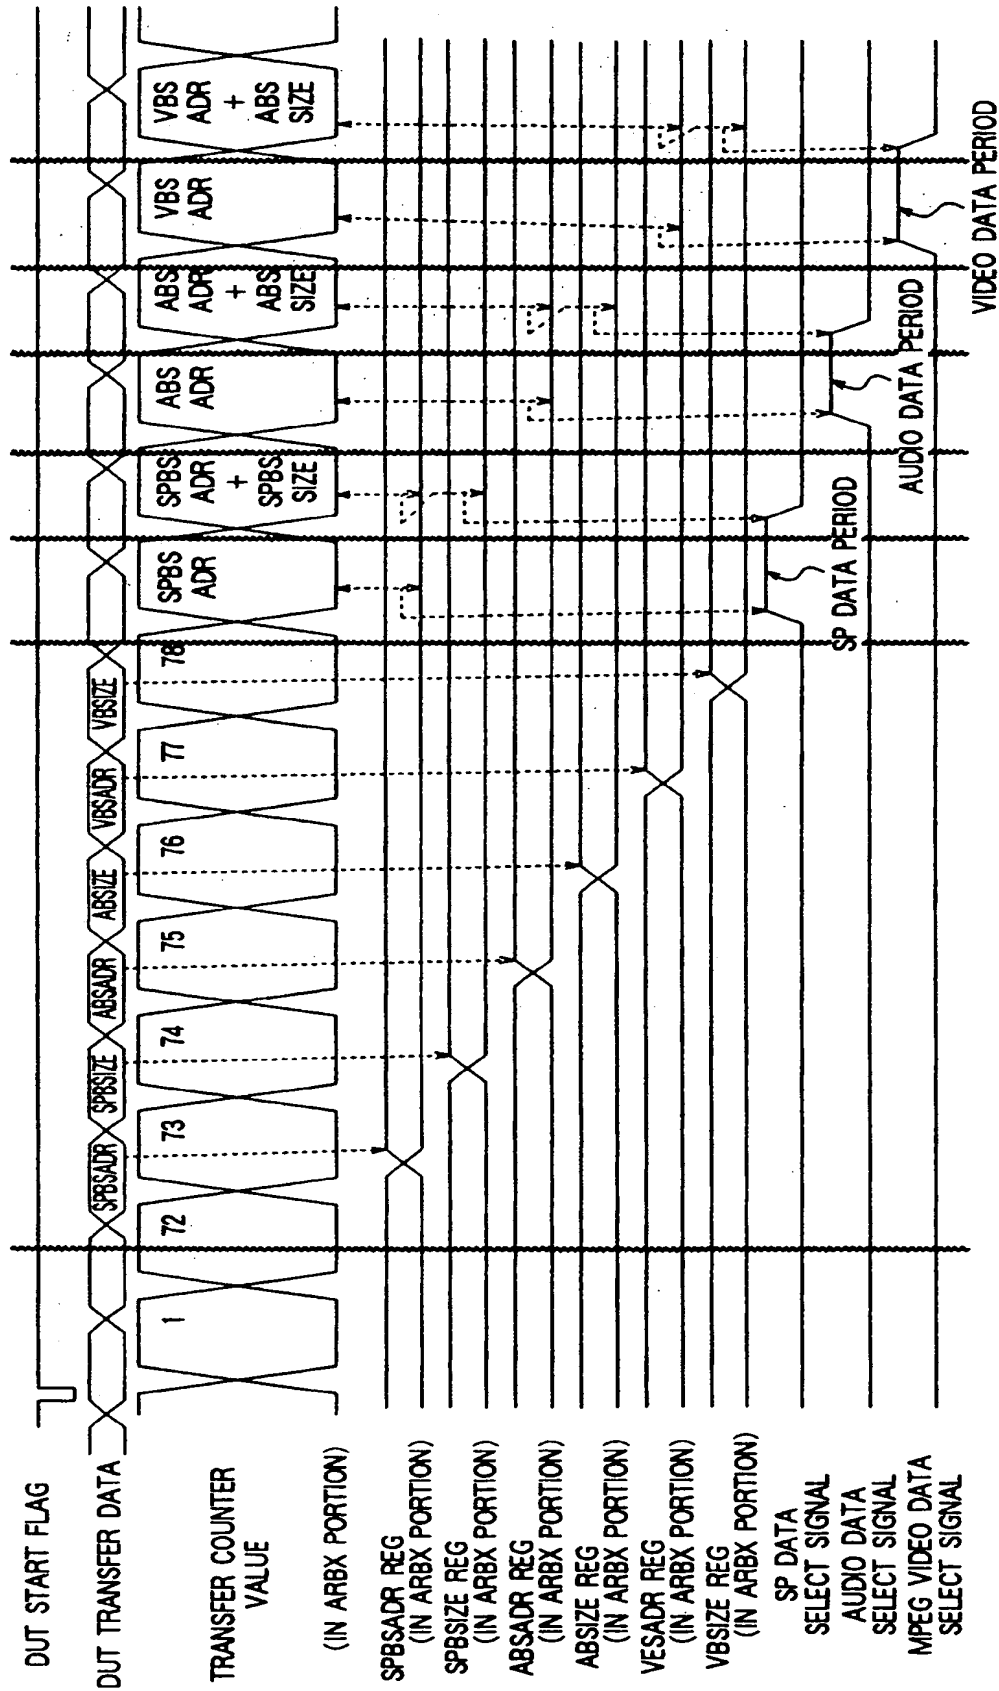


FIG. 9

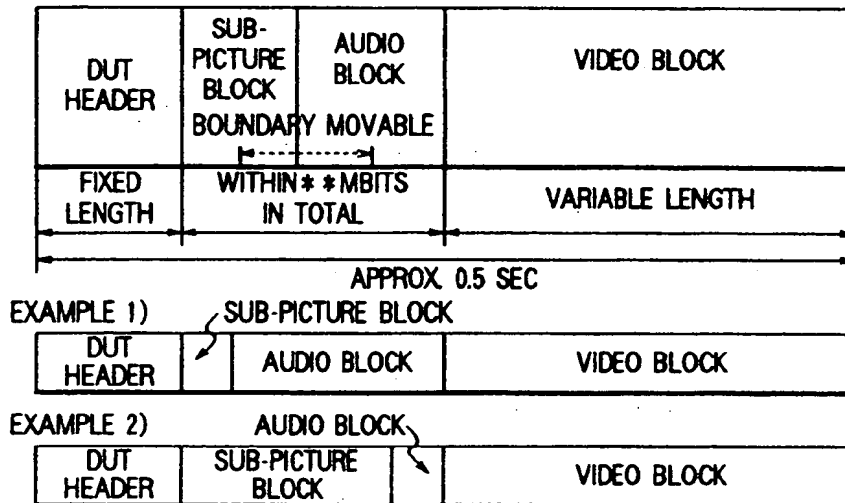


FIG. 10

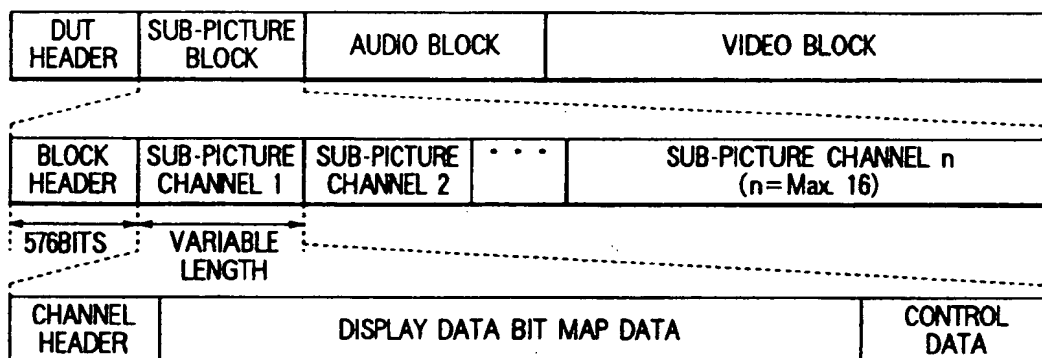


FIG. 11

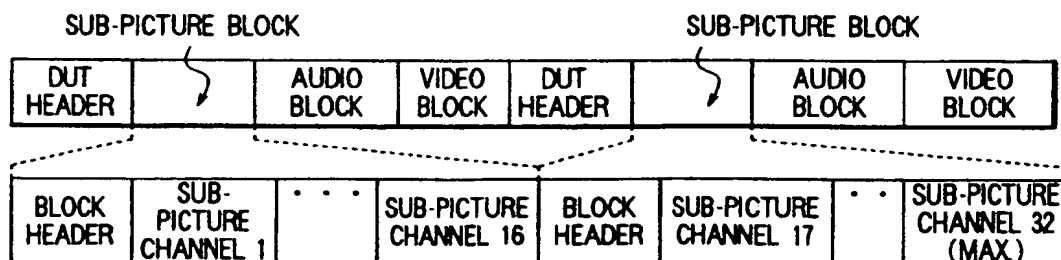


FIG. 12

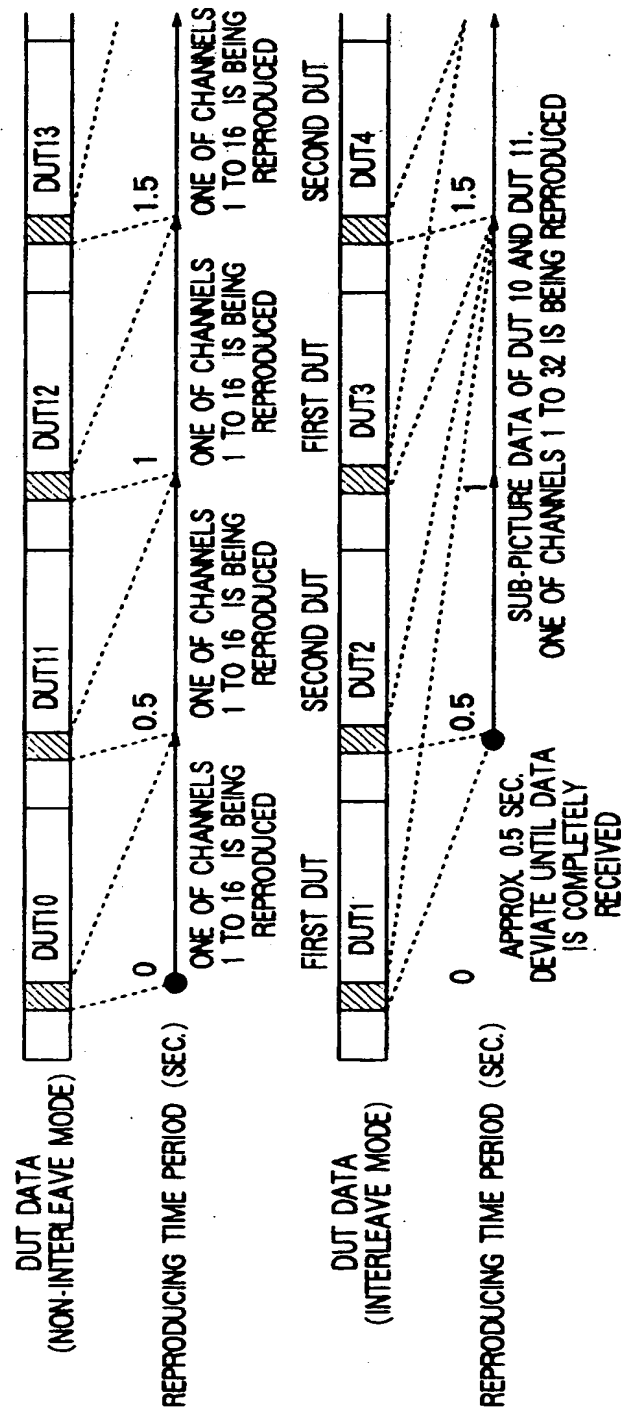


FIG. 13

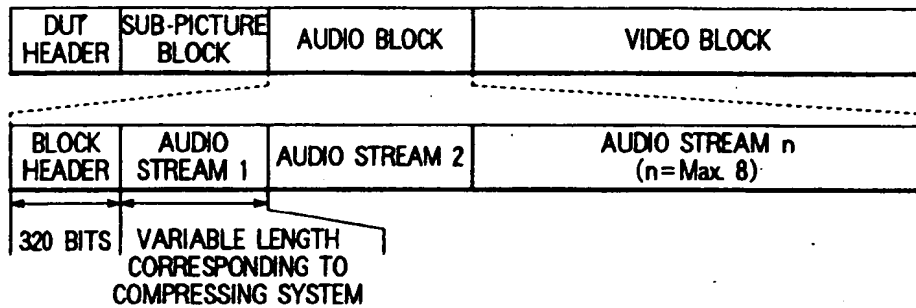


FIG. 14

PARAMETER	DESCRIPTION	BYTES
ABID	AUDIO BLOCK IDENTIFIER	1 BYTE
ABSIZE	AUDIO BLOCK SIZE	3 BYTES
AVSYNC	SYNCHRONOUS POINTER FOR SYNCHRONIZATION WITH SOUND 15                      11 10                      0 [SOUND FRAM NUMBER] [DECODED SOUND SAMPLE NUMBER]	4 BYTES (2 BYTES RESERVED)
AADRS1	START ADDRESS OF AUDIO STREAM 1 : RELATIVE ADDRESS MEASURED FROM BEGINNING OF AUDIO DATA BLOCK ABSENCE OF STREAM → \$00000000 31 30                      24 23                      16 15                      8 7                      0 [C] [NUMBER OF FRAMES] [STREAM START ADDRESS] C : 1=REDUCED DATA IS SENT FOR ONE FRAME (REDUCTION MODE) NUMBER OF TIMES OF FRAMES : NUMBER OF TIMES OF REPETITION OF REDUCED DATA (VALID WHEN C=1)	4 BYTES
:	:	
AADRS8	START ADDRESS OF AUDIO STREAM 8 : RELATIVE ADDRESS MEASURED FROM BEGINNING OF AUDIO DATA BLOCK ABSENCE OF STREAM → \$00000000 31 30                      24 23                      16 15                      8 7                      0 [C] [NUMBER OF TIMES OF FRAMES] [STREAM START ADDRESS] C : 1=REDUCED DATA IS SENT FOR ONE FRAME (REDUCTION MODE) NUMBER OF FRAMES : NUMBER OF TIMES OF REPETITION OF REDUCED DATA (VALID WHEN C=1)	4 BYTES

FIG. 15

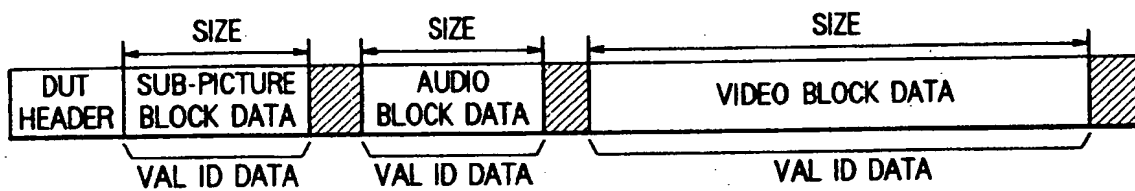


FIG. 16

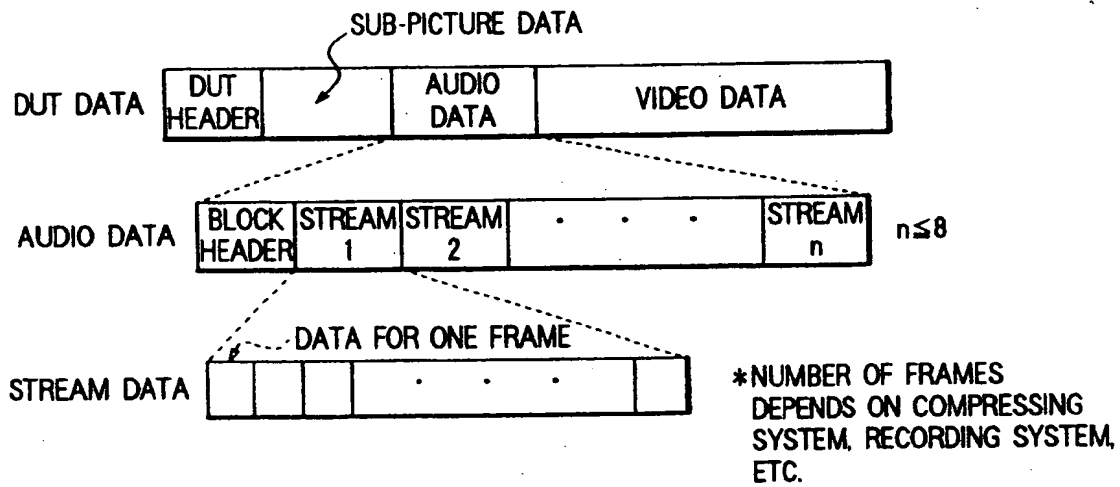


FIG. 17

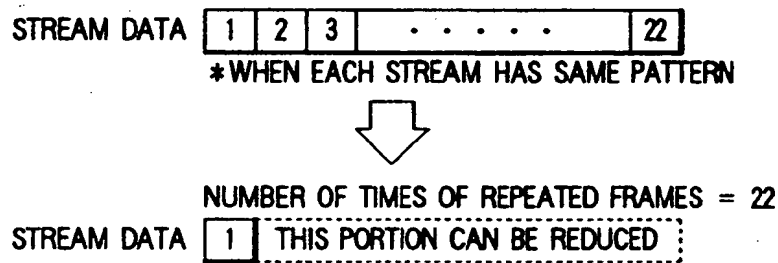


FIG. 18

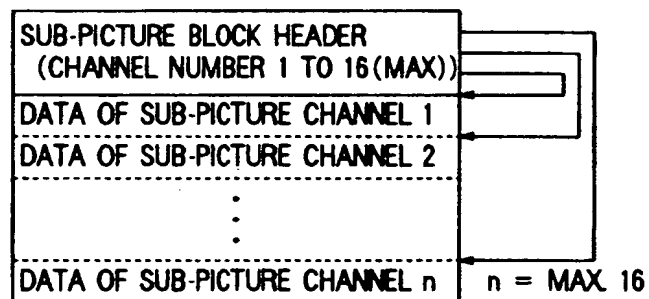


FIG. 19

PARAMETER	DESCRIPTION	BYTES						
SPBID	SUB-PICTURE BLOCK IDENTIFIER	1 BYTE						
SPBSIZE	SUB-PICTURE BLOCK SIZE	3 BYTES						
SPSNO	SUB-PICTURE DIVISION NUMBER : PICTURE RECORD MODE/DIVISION NUMBER 7      6 5      1      0 <table><tr><td>MODE</td><td></td><td>DIVISION NUMBER</td></tr></table> MODE : 00→NON-INTERLEAVE 11→INTERLEAVE DIVISION NUMBER : 0=FIRST RECORD DUT 1=SECOND RECORD DUT (NOTE : VALID ONLY IN INTERLEAVE RECORD MODE)	MODE		DIVISION NUMBER	4 BYTES ( 3 BYTES RESERVED)			
MODE		DIVISION NUMBER						
SPADRC1	START ADDRESS OF SUB-PICTURE CHANNEL 1 : RELATIVE ADDRESS MEASURED FROM BEGINNING OF SUB-PICTURE ABSENCE OF SUB-PICTURE → \$00000000 31 30 29 28 27      24      16 15      8 7      0 <table><tr><td>D</td><td>W</td><td>S</td><td>C</td><td>RESERVED</td><td>FRAME START ADDRESS</td></tr></table> D : 1=WITH CHANNEL DATA IMMEDIATELY DISPLAYED W : 1=WITH CHANNEL DATA DISPLAY HELD UNTIL "S" IS DESIGNATED S : 1=START DISPLAYING DUT DESIGNATED BY "W" C : 1=CLEAR SUB-PICTURE SCREEN	D	W	S	C	RESERVED	FRAME START ADDRESS	4 BYTES
D	W	S	C	RESERVED	FRAME START ADDRESS			
⋮	⋮							
SPADRC16	START ADDRESS OF SUB-PICTURE CHANNEL 1 : RELATIVE ADDRESS MEASURED FROM BEGINNING OF SUB-PICTURE ABSENCE OF SUB-PICTURE → \$00000000 31 30 29 28 27      24      16 15      8 7      0 <table><tr><td>D</td><td>W</td><td>S</td><td>C</td><td>RESERVED</td><td>FRAME START ADDRESS</td></tr></table> D : 1=WITH CHANNEL DATA IMMEDIATELY DISPLAYED W : 1=WITH CHANNEL DATA DISPLAY HELD UNTIL "S" IS DESIGNATED S : 1=START DISPLAYING DUT DESIGNATED BY "W" C : 1=CLEAR SUB-PICTURE SCREEN	D	W	S	C	RESERVED	FRAME START ADDRESS	4 BYTES
D	W	S	C	RESERVED	FRAME START ADDRESS			

FIG. 20

PARAMETER	DESCRIPTION	BYTES																
SPDDADR	START ADDRESS OF SUB-PICTURE DISPLAY DATA : RELATIVE ADDRESS MEASURED FROM BEGINNING OF EACH CHANNEL	2 BYTES																
SPCDADR	START ADDRESS OF SUB-PICTURE CONTROL DATA : RELATIVE ADDRESS MEASURED FROM BEGINNING OF EACH CHANNEL	2 BYTES																
SPDSIZE	DISPLAY START POSITION (X,Y), DISPLAY WIDTH, AND DISPLAY HEIGHT OF SUB-PICTURE <table><tr><td>7</td><td>6</td><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td><td>0</td></tr><tr><td colspan="2">X COORDINATE (2 BYTES)</td><td colspan="2">Y COORDINATE (2 BYTES)</td><td colspan="2">DISPLAY WIDTH (2 BYTES)</td><td colspan="2">DISPLAY HEIGHT (2 BYTES)</td></tr></table>	7	6	5	4	3	2	1	0	X COORDINATE (2 BYTES)		Y COORDINATE (2 BYTES)		DISPLAY WIDTH (2 BYTES)		DISPLAY HEIGHT (2 BYTES)		8 BYTES
7	6	5	4	3	2	1	0											
X COORDINATE (2 BYTES)		Y COORDINATE (2 BYTES)		DISPLAY WIDTH (2 BYTES)		DISPLAY HEIGHT (2 BYTES)												
SPCINFO	SUB-PICTURE COLOR INFORMATION : COLOR FOR USE IS SELECTED FROM 16 COLORS OF PALETTE ON STORY INFORMATION TABLE <table><tr><td>7</td><td>6</td><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td><td>0</td></tr><tr><td colspan="4">RESERVED</td><td colspan="4">SUB-PICTURE COLOR SETTING (PALETTE COLOR NUMBER)</td></tr></table>	7	6	5	4	3	2	1	0	RESERVED				SUB-PICTURE COLOR SETTING (PALETTE COLOR NUMBER)				1 BYTE
7	6	5	4	3	2	1	0											
RESERVED				SUB-PICTURE COLOR SETTING (PALETTE COLOR NUMBER)														
SPADJINFO	SUB-PICTURE EDGE COMPENSATION INFORMATION : EDGE COMPENSATION EXECUTING FLAG, EDGE COLOR (PALETTE NUMBER) <table><tr><td>7</td><td>6</td><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td><td>0</td></tr><tr><td colspan="2">EDGE COMPENSATION EXECUTING FLAG</td><td colspan="6">EDGE COLOR SETTING (PALETTE COLOR NUMBER)</td></tr></table>	7	6	5	4	3	2	1	0	EDGE COMPENSATION EXECUTING FLAG		EDGE COLOR SETTING (PALETTE COLOR NUMBER)						1 BYTE
7	6	5	4	3	2	1	0											
EDGE COMPENSATION EXECUTING FLAG		EDGE COLOR SETTING (PALETTE COLOR NUMBER)																
SPCONT	MIXTURE RATIO OF SUB-PICTURE AND MAIN PICTURE : MAIN PICTURE =(255-PRESET VALUE)/255 SUB-PICTURE=PRESET VALUE/255	1 BYTE																
SPDST	SUB-PICTURE DISPLAY START TIMING : FRAME NUMBER OF MAIN PICTURE (NORMALLY, FRAME NUMBER OF 1 PICTURE (#2))	1 BYTE																



FIG. 21

STATES OF SUB-PICTURE DATA IN DUT AND SPADRC \* \* 31ST BIT TO 28TH BIT  
(NOTE : 31ST BIT = D, 30TH BIT = W, 29TH BIT = S, 28TH BIT = C)


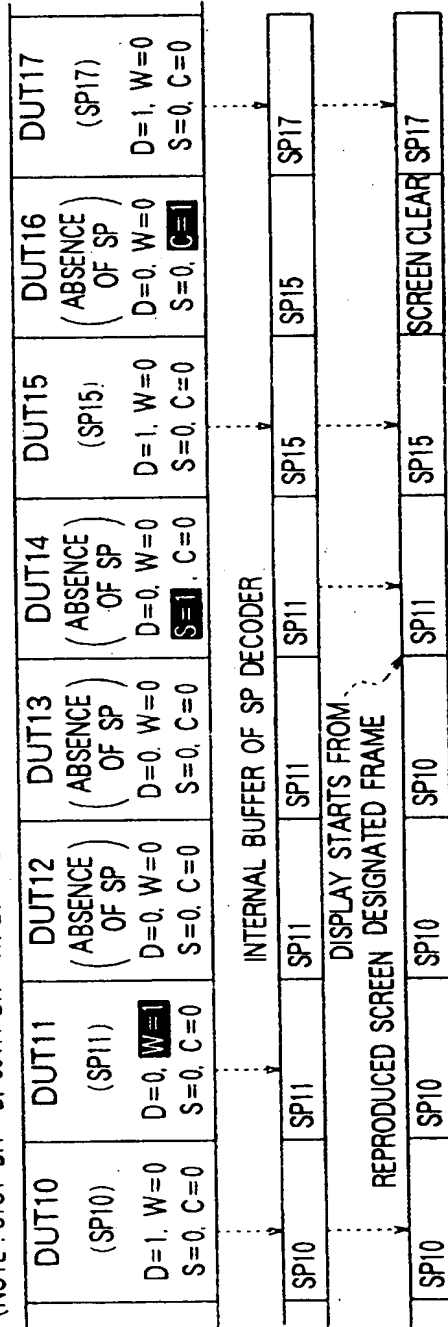


FIG. 22

PARAMETER	DESCRIPTION	BYTES
PRGNO	PROGRAM NUMBER OF DUT	2 BYTES
DUTNO	DUT NUMBER OF FILE : FILE START DUT = 0 INCREMENTED BY 1	4 BYTES
RESERVED	RESERVED	2 BYTES
FSADRS	NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO THIS DUT	4 BYTES
FWD10	NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO 10-LATER DUT	4 BYTES
FWD5	NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO 5-LATER DUT	4 BYTES
FWD1	NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO 1-LATER DUT	4 BYTES
BWD1	NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO 1-PRIOR DUT	4 BYTES
BWD5	NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO 5-PRIOR DUT	4 BYTES
BWD10	NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO 10-PRIOR DUT	4 BYTES
RESERVED	RESERVED	28 BYTES

FIG. 23

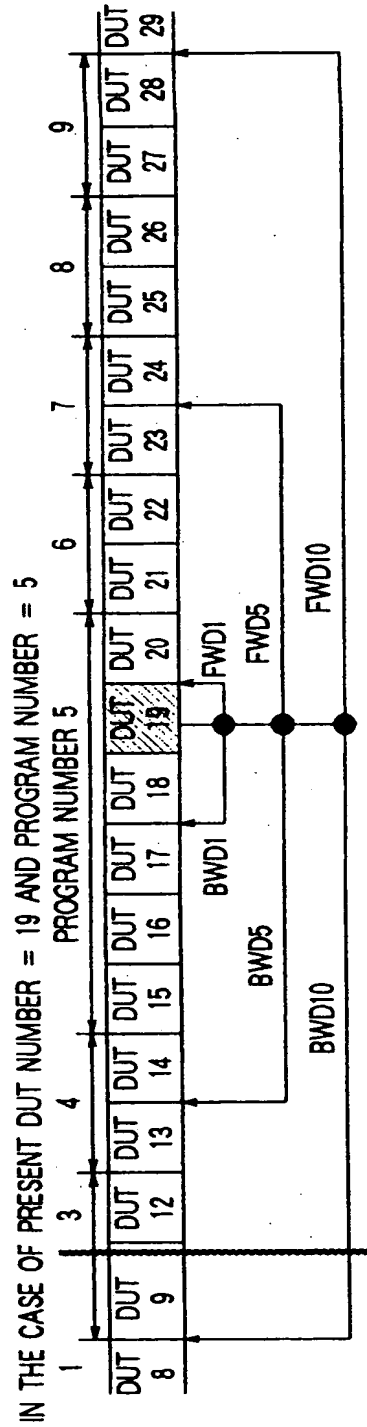

FWD10 = NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO DUT 29  
 FWD5 = NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO DUT 24  
 FWD1 = NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO DUT 20  
 BWD1 = NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO DUT 18  
 BWD5 = NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO DUT 14  
 BWD10 = NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO DUT 9

FIG. 24


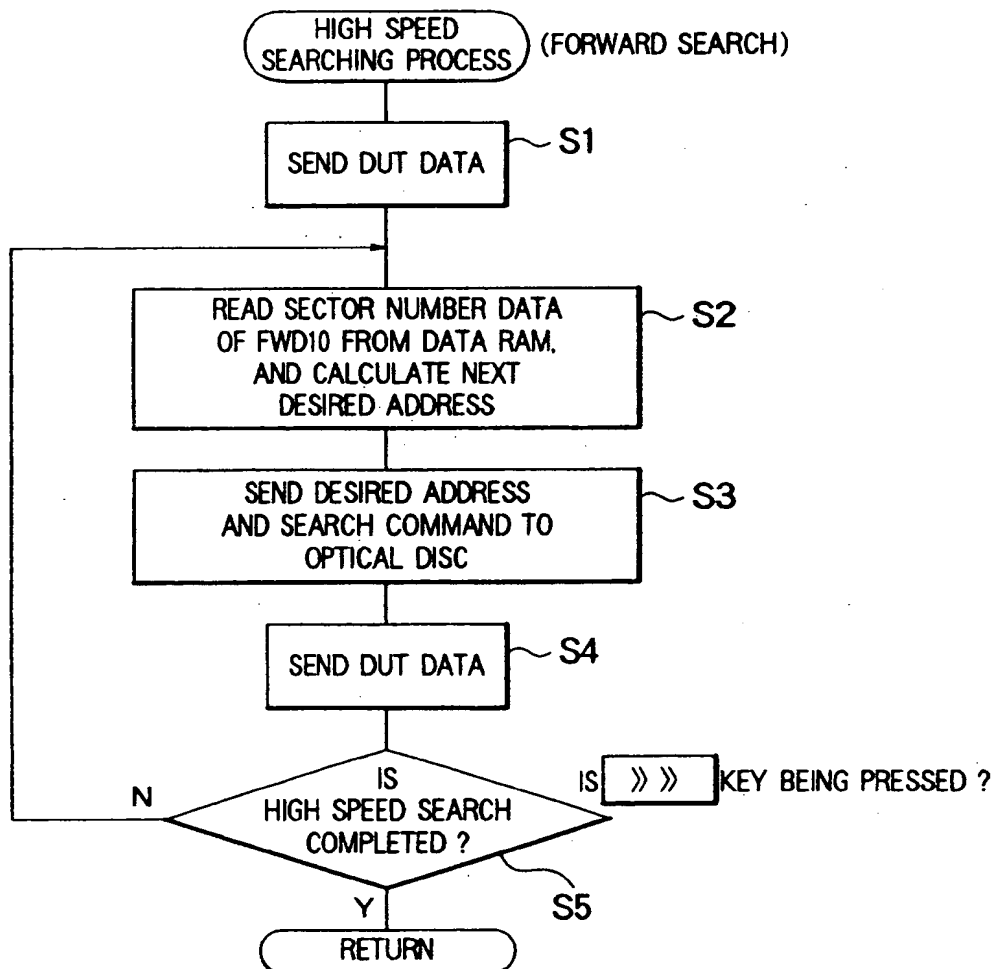


FIG. 25

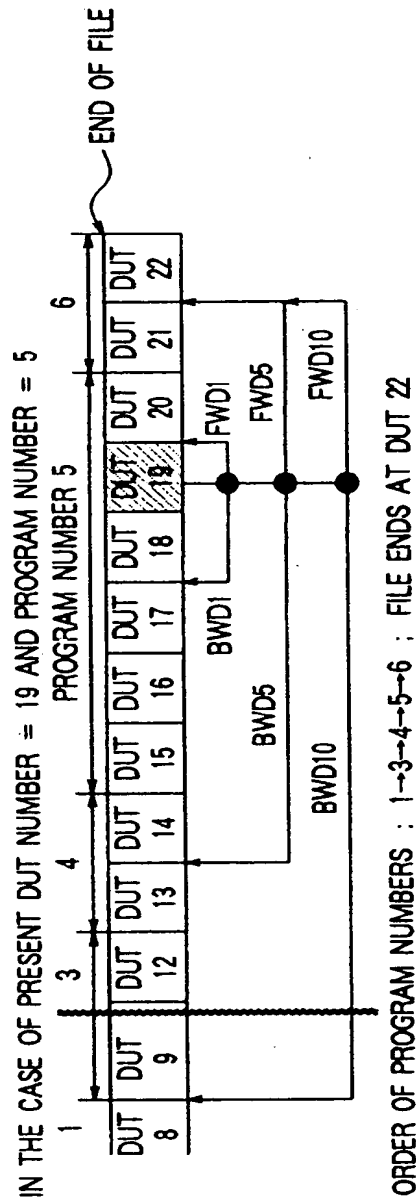

FWD10 = NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO DUT 22 (BECAUSE FILE ENDS AT DUT 22)  
 FWD5 = NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO DUT 22 (BECAUSE FILE ENDS AT DUT 22)  
 FWD1 = NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO DUT 20  
 BWD1 = NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO DUT 18  
 BWD5 = NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO DUT 14  
 BWD10 = NUMBER OF SECTORS FROM BEGINNING OF DUT HEADER TO DUT 9

FIG. 26

PARAMETER	DESCRIPTION	BYTES
RPRGNO	NEXT PROGRAM NUMBER SUCCESSIVELY REPRODUCIBLE IN THE CASE THAT THIS NUMBER DIFFERS WHEN CHANGING PROGRAM VIDEO STREAM : RECOMMENDED TO REMOVE CONNECTION NOISE IN CHANGING PROGRAM CORRESPONDING TO LINK PROCESS. AUDIO STREAM : RECOMMENDED TO REMOVE CONNECTION NOISE IN CHANGING PROGRAM CORRESPONDING TO MUTE PROCESS.	2 BYTES
AVSYNC	SYNCHRONOUS POINTER FOR SYNCHRONIZATION WITH PICTURE AND SOUND 15                      11 10                      0 <div style="border: 1px solid black; display: inline-block; padding: 2px;">SOUND FRAME NUMBER</div> <div style="border: 1px solid black; display: inline-block; padding: 2px;">DECODED SOUND SAMPLE NUMBER</div>	2 BYTES
SPSNO	SUB-PICTURE DIVISION NUMBER : RECORD MODE OF PICTURE/DIVISION NUMBER 7    6 5                      1    0 <div style="border: 1px solid black; display: inline-block; padding: 2px;">MODE</div> <div style="border: 1px solid black; display: inline-block; padding: 2px;">DIVISION NUMBER</div> MODE : 00→NON-INTERLEAVE 11→INTERLEAVE DIVISION NUMBER : 0=FIRST RECORD DUT 1=SECOND RECORD DUT VALID ONLY IN INTERLEAVE RECORDING	1 BYTE
PARENT	PARENTAL : DUT UNIT REPRODUCTION DISABLE/ENABLE FLAG 7    6 5                      4 3    0 <div style="border: 1px solid black; display: inline-block; padding: 2px;">NOT USED</div> <div style="border: 1px solid black; display: inline-block; padding: 2px;">PARENTAL</div> <div style="border: 1px solid black; display: inline-block; padding: 2px;">NOT USED</div> PARENTAL : 00=REPRODUCTION ENABLED 01=REPRODUCTION DISABLED	1 BYTE
EFFECT	EDGE EFFECT : SIGNAL HIGH FOR EFFECT 15 14                      0 <div style="border: 1px solid black; display: inline-block; padding: 2px;">EF</div> <div style="border: 1px solid black; display: inline-block; padding: 2px;">NOT USED</div> EF : 0=EDGE OFF 1=EDGE ON	2 BYTES
VFRAME	NUMBER OF VIDEO REPRODUCTION FRAMES : DISPLAY TOTAL NUMBER OF VIDEO DISPLAY FRAMES AND I PICTURE START FRAME NUMBER 7                      6 5                      0 <div style="border: 1px solid black; display: inline-block; padding: 2px;">OFFSET FRAME NUMBER</div> <div style="border: 1px solid black; display: inline-block; padding: 2px;">TOTAL NUMBER OF FRAMES</div> OFFSET FRAME NUMBER : DISPLAY START FRAME NUMBER OF I PICTURE : 0 TO 3 TOTAL NUMBER OF FRAMES : TOTAL NUMBER OF FRAMES IN SUB-PICTURE DISPLAY PERIOD : 12 TO 18 IN NON-INTERLEAVE MODE : 24 TO 36 IN INTERLEAVE MODE NUMBER OF FRAMES IS NUMBER OF TOP FIELDS.	2 BYTES
RESERVED	RESERVED	2 BYTES

FIG. 27

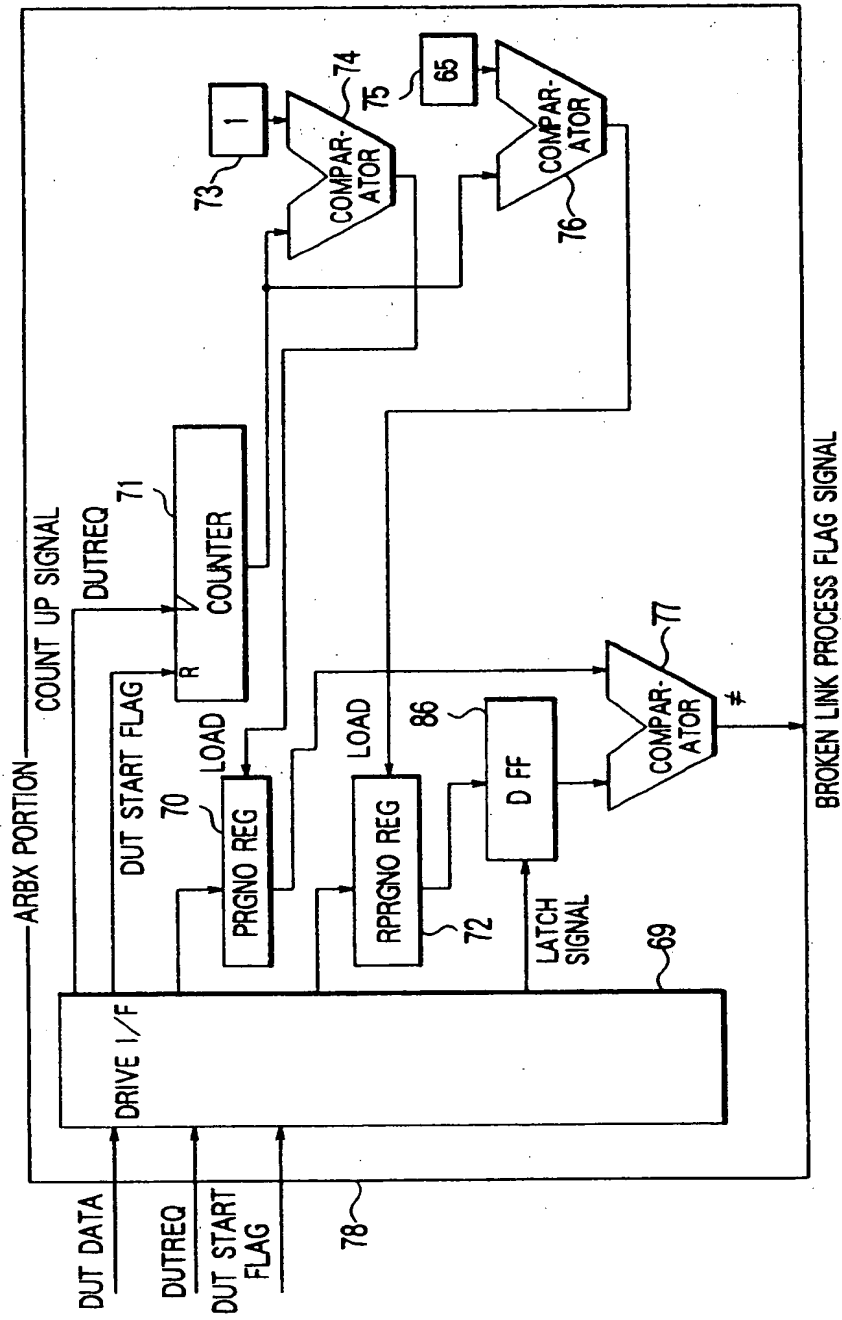


FIG. 28

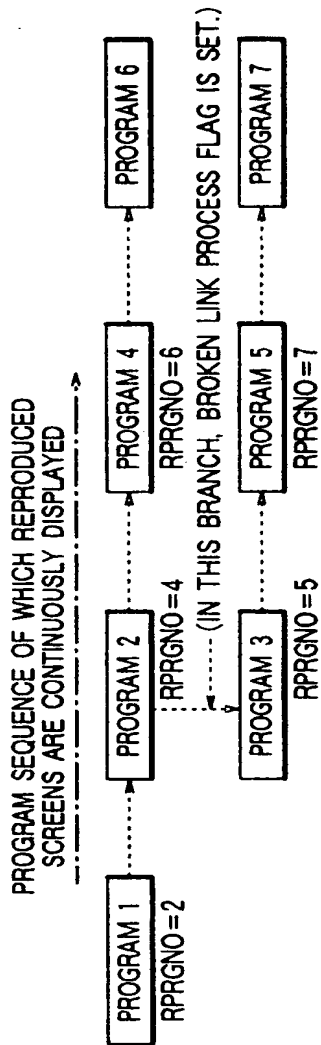


FIG. 29

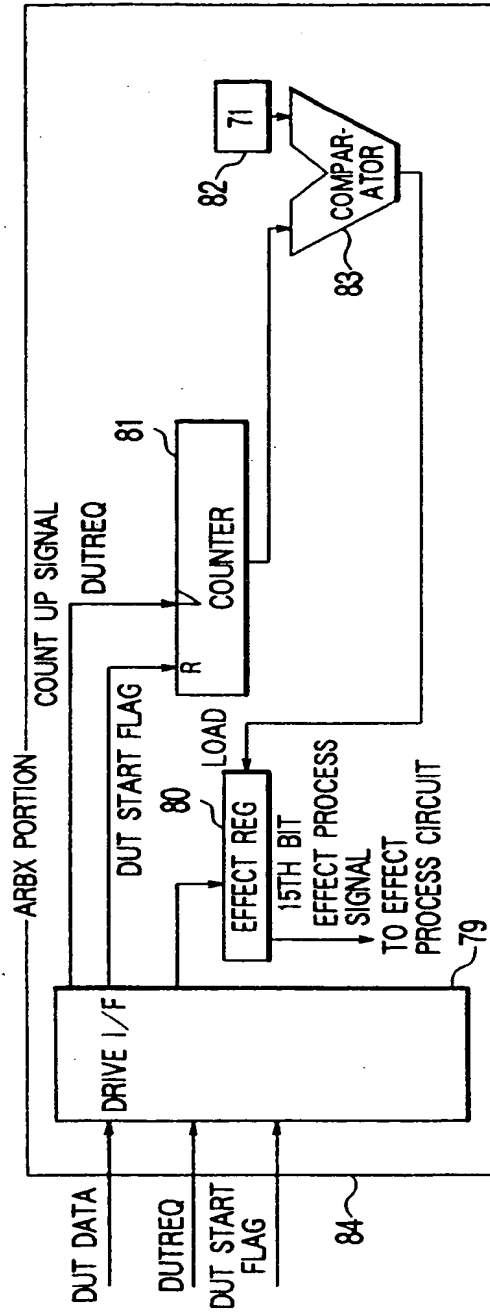




FIG. 30

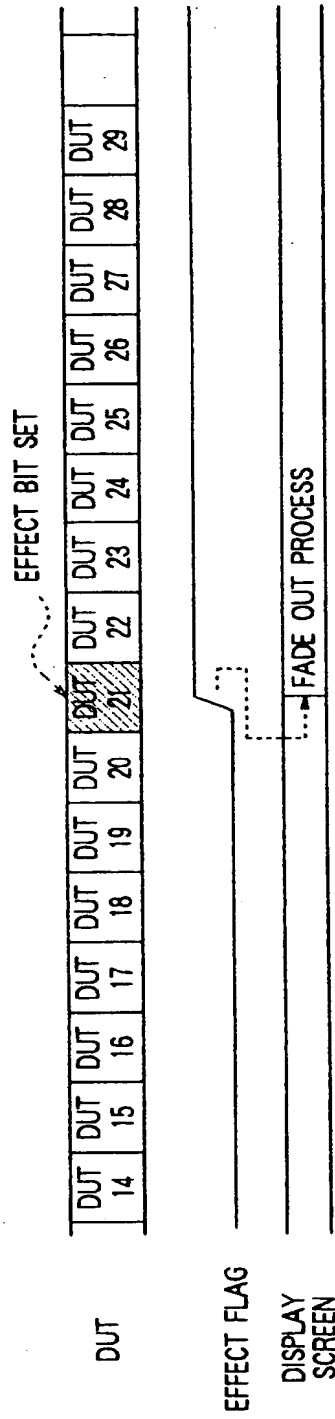


FIG. 31

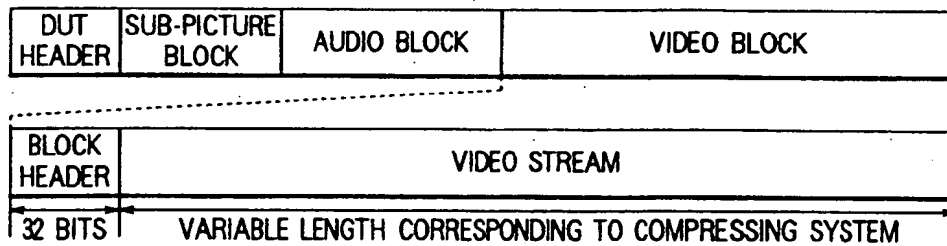


FIG. 32

PARAMETER	DESCRIPTION	BYTES
VBID	AUDIO BLOCK IDENTIFIER	1 BYTE
VBSIZE	VIDEO BLOCK SIZE	3 BYTES

FIG. 33

PARAMETER	DESCRIPTION	BYTES
VADRF1	START ADDRESS OF VIDEO PICTURE 1 : RELATIVE ADDRESS MEASURED FROM BEGINNING OF VIDEO DATA BLOCK ABSENCE OF PICTURE → \$00000000 31 30 24 23 16 15 8 7 0 <div style="border: 1px solid black; padding: 2px; display: inline-block;">             C RESERVED PICTURE START ADDRESS           </div> C : 1=SCREEN CLEAR	4 BYTES
⋮	⋮	
VADRF15	START ADDRESS OF VIDEO PICTURE 15 : RELATIVE ADDRESS MEASURED FROM BEGINNING OF VIDEO DATA BLOCK ABSENCE OF PICTURE → \$00000000 31 30 24 23 16 15 8 7 0 <div style="border: 1px solid black; padding: 2px; display: inline-block;">             C RESERVED PICTURE START ADDRESS           </div> C : 1=SCREEN CLEAR	4 BYTES

FIG. 34

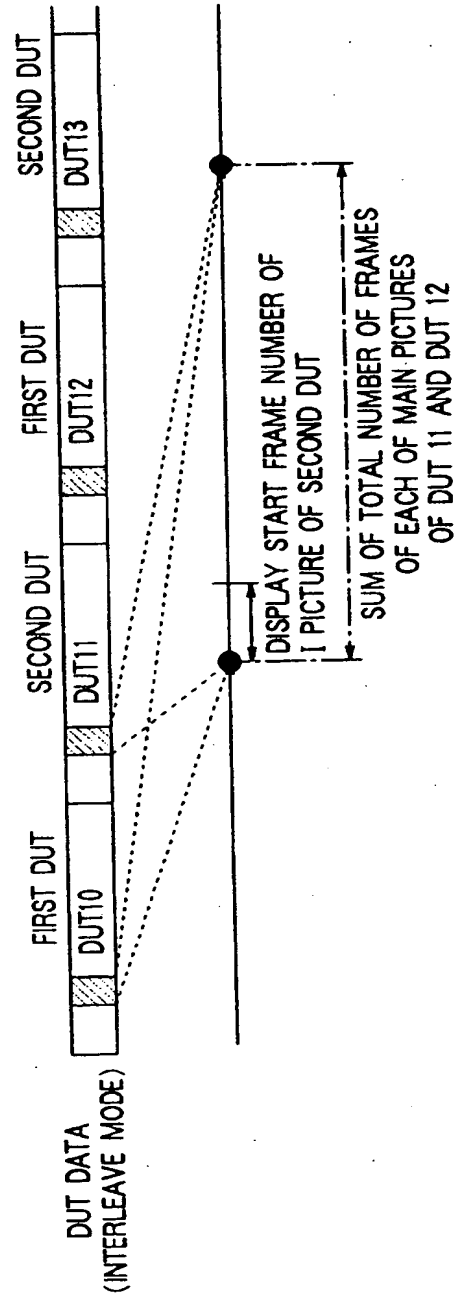


FIG. 35

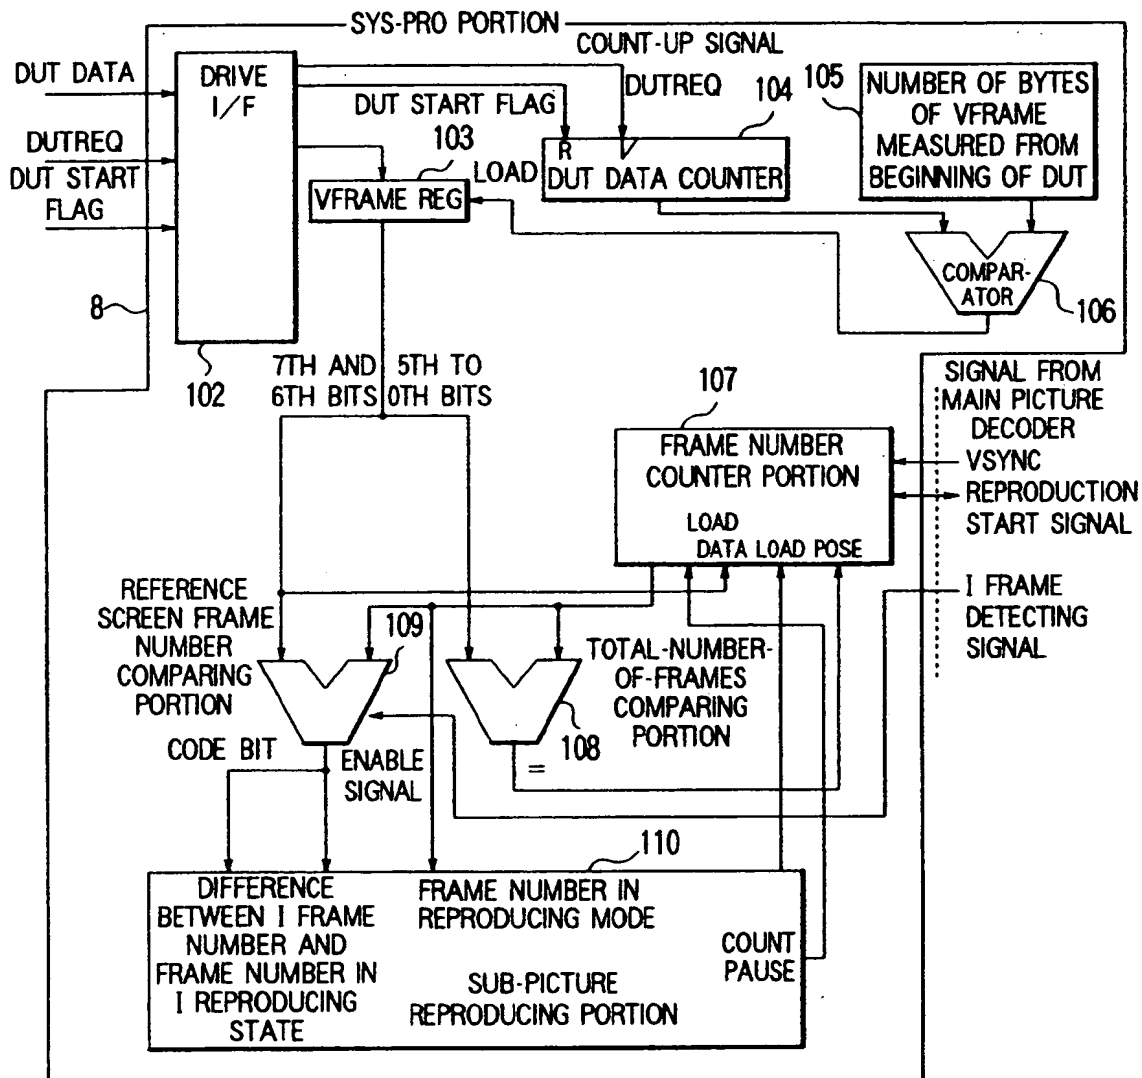


FIG. 36

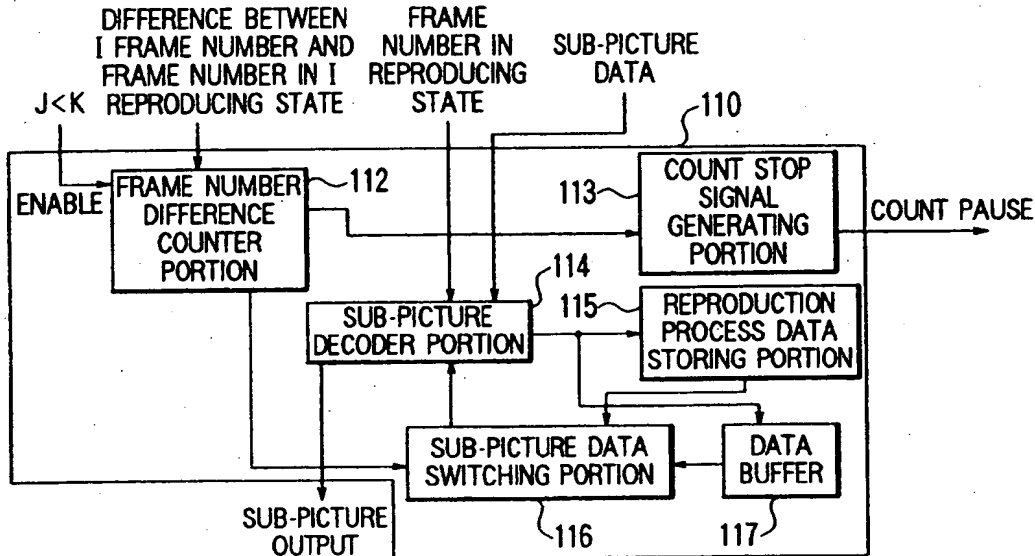


FIG. 37

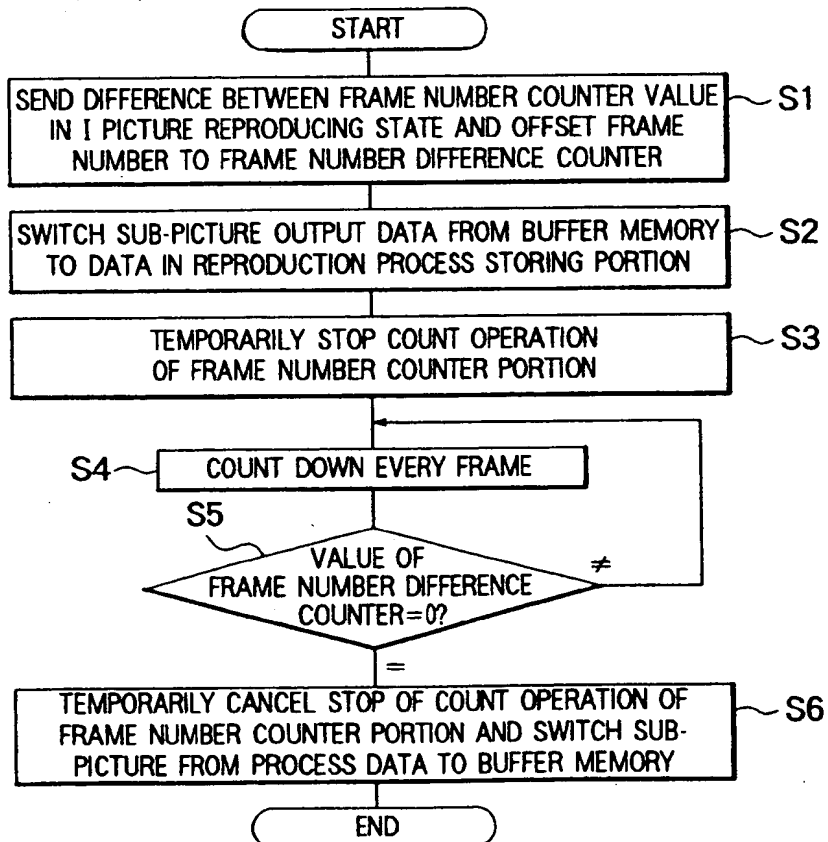


FIG. 38

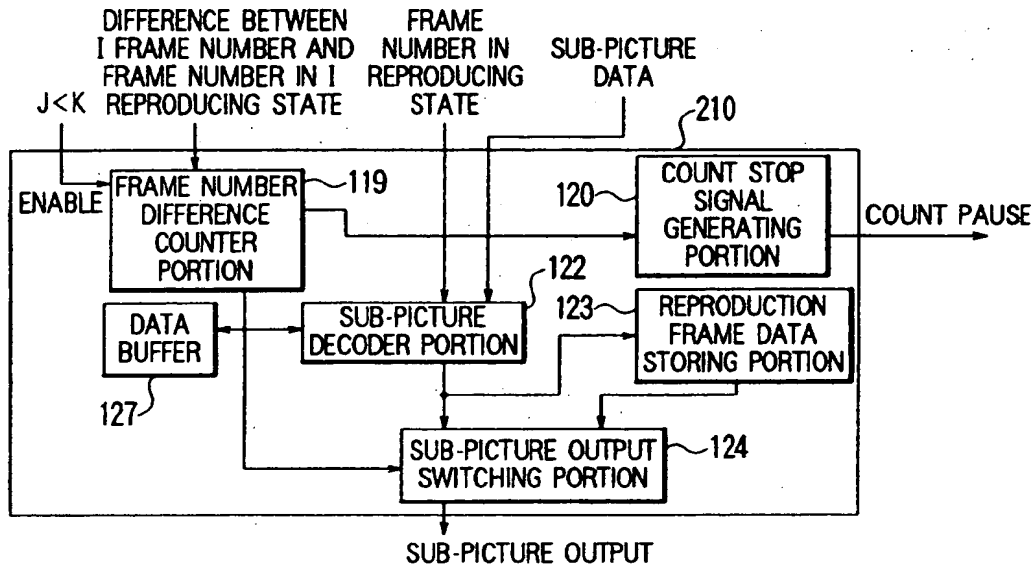


FIG. 39

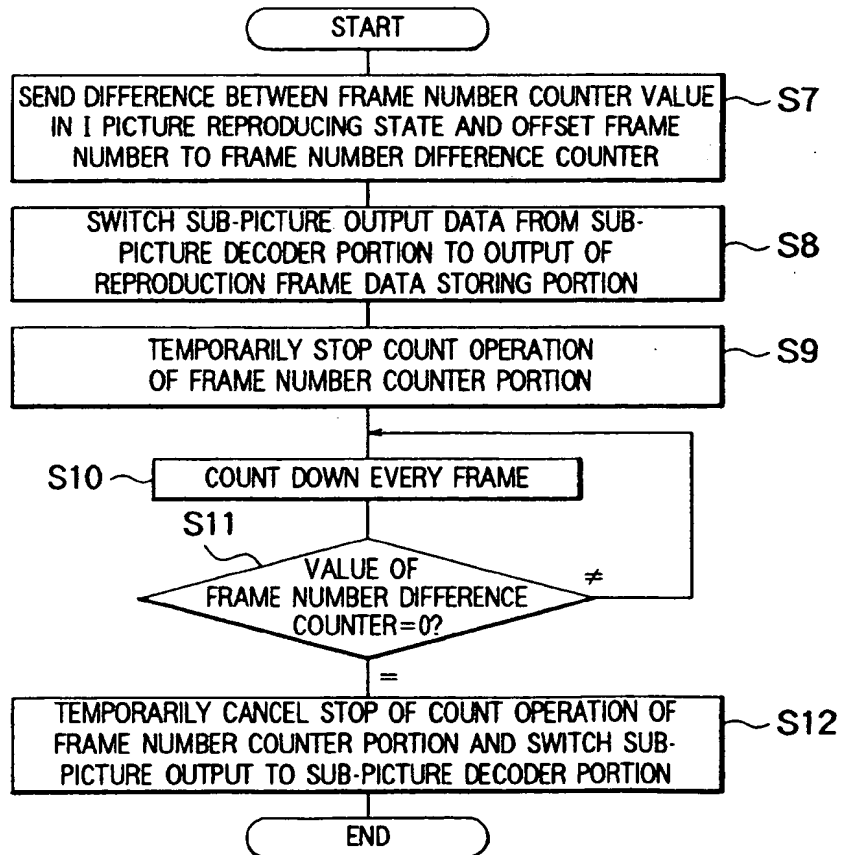


FIG. 40



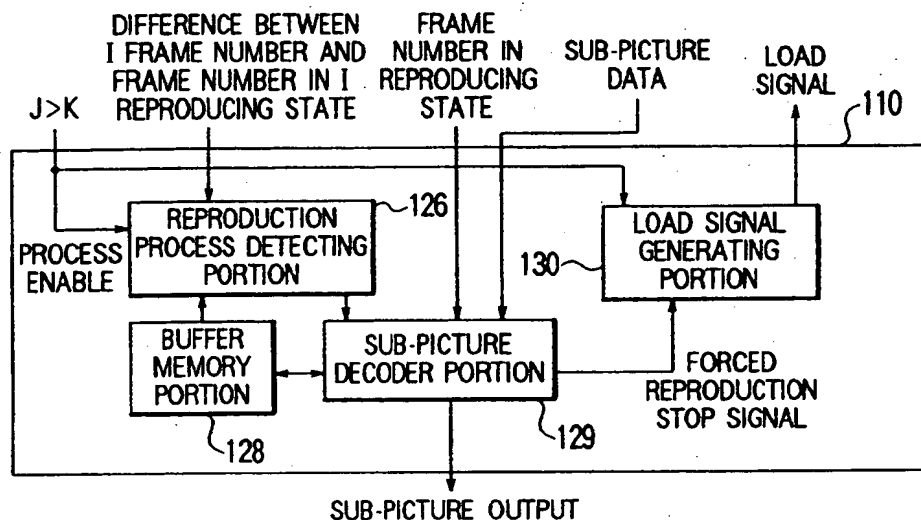


FIG. 41

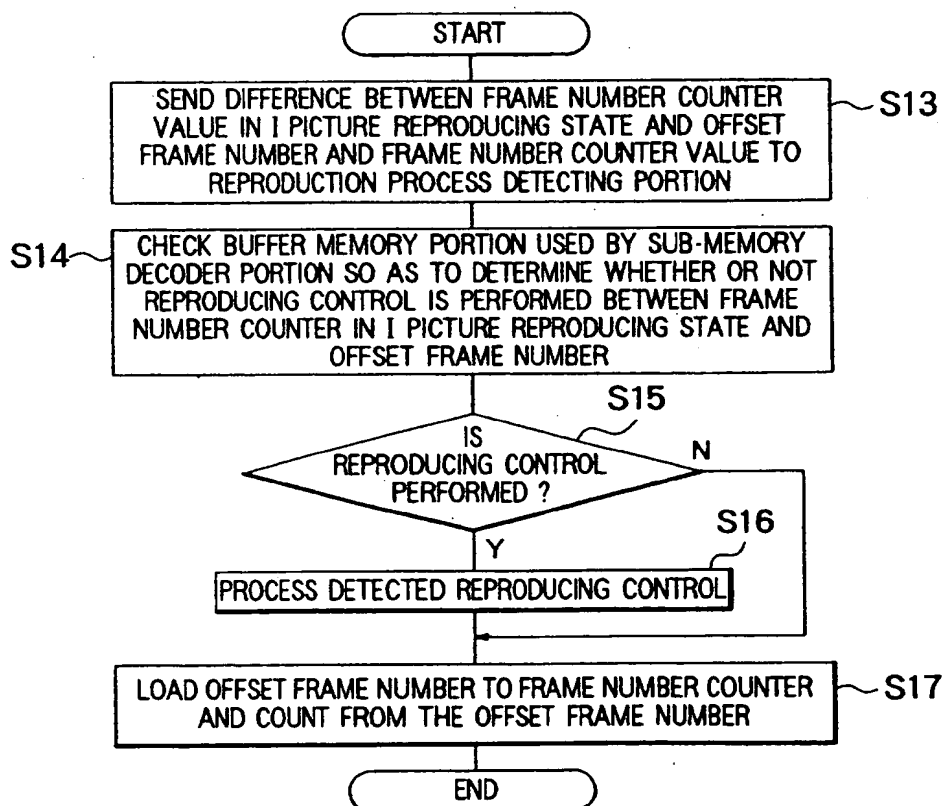


# FIG. 42

PRIOR ART



# FIG. 43


PRIOR ART

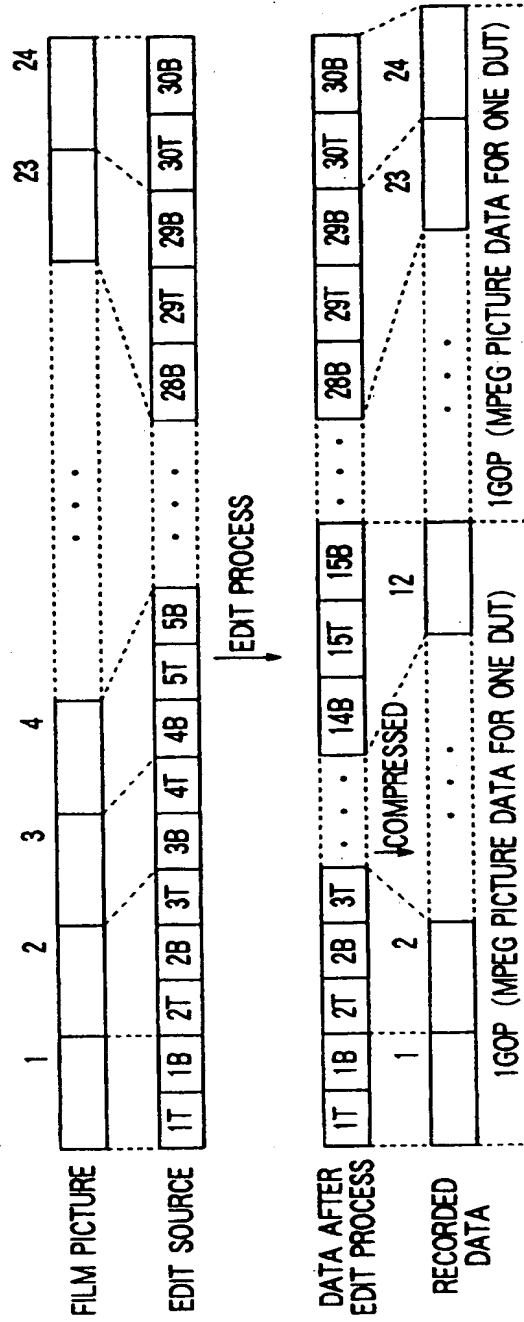




# FIG. 44


PRIOR ART

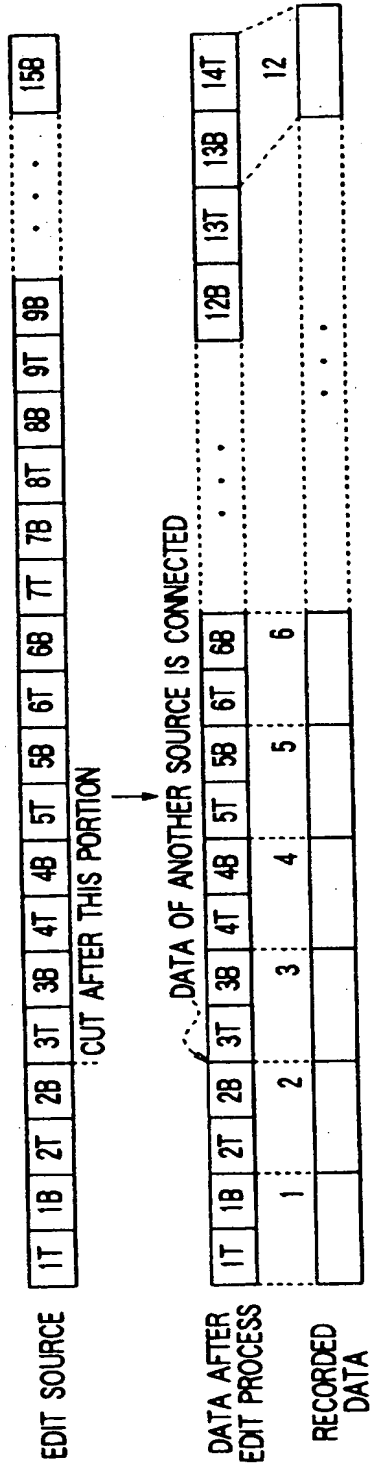

# FIG. 45

PRIOR ART

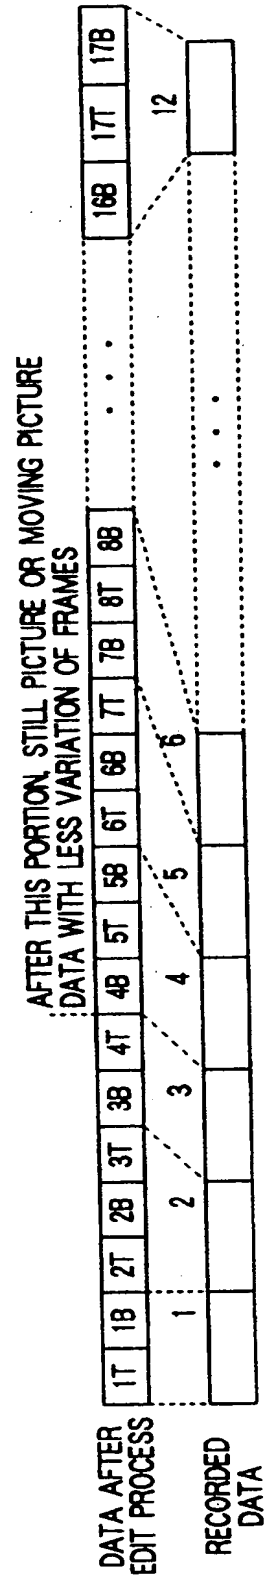



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 677 961 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
23.04.1997 Bulletin 1997/17

(51) Int. Cl.<sup>6</sup>: H04N 5/926, H04N 7/52,  
G11B 20/12, G11B 27/30

(43) Date of publication A2:  
18.10.1995 Bulletin 1995/42

(21) Application number: 95300670.7

(22) Date of filing: 02.02.1995

(84) Designated Contracting States:  
DE FR GB NL

(30) Priority: 13.04.1994 JP 74863/94  
28.09.1994 JP 233789/94

(71) Applicants:  
• KABUSHIKI KAISHA TOSHIBA  
Kawasaki-shi, Kanagawa-ken 210 (JP)  
• TOSHIBA AVE CO., LTD  
Minato-ku, Tokyo 105 (JP)

(72) Inventors:  
• Kikuchi, Shinichi,  
c/o Intellectual Property Div.  
Tokyo (JP)

• Kitamura, Tetsuya,  
c/o Intellectual Property Div.  
Tokyo (JP)  
• Mimura, Hideki,  
c/o Intellectual Property Div.  
Tokyo (JP)  
• Taira, Kazuhiko,  
c/o Intellectual Property Div.  
Tokyo (JP)


(74) Representative: Maury, Richard Philip  
MARKS & CLERK,  
57-60 Lincoln's Inn Fields  
London WC2A 3LS (GB)

(54) Method for recording and reproducing data

(57) A header for controlling each data block is disposed at the beginning of a data unit composed of a combination of video data, sound data, and sub-picture data. Header data is disposed at the beginning of each data block to control data in the data block. Thus, in par-

ticular, when a plurality of channels of data and a plurality of streams of data are recorded in a data block and one of them is selected, each channel data and each stream data can be properly controlled.

FIG. 1

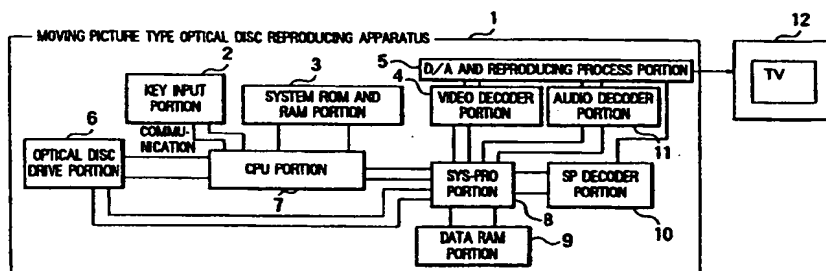

EP 0 677 961 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 95 30 0670

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
P,X	WO 94 30014 A (SONY CORP) 22 December 1994 * the whole document *	1-4	H04N5/926 H04N7/52 G11B20/12 G11B27/30
X	US 5 068 744 A (ITO KENJI) 26 November 1991 * abstract *	1-4	
X	MPEG1 STANDARD, SECTION 1: SYSTEMS: "Coding of Moving Pictures and Associated Audio for Digital Storage Media at up to about 1.5Mbits/s" March 1992, ISO/IEC JTC1/SC29/WG11, CD11172-1, REVISION 2, DOCUMENT N156, XP002019450	1,2	
A	* page 1 - page 57 *	3,4	
X	WO 94 07332 A (SONY CORP) 31 March 1994	1-4	
Y	* the whole document *	5-17	
Y	EP 0 521 487 A (SONY CORP) 7 January 1993 * column 11, line 27 - column 14, line 54; figures 1-8 *	5-17	TECHNICAL FIELDS SEARCHED (Int.Cl.6)
A	EP 0 325 325 A (PHILIPS & DU PONT OPTICAL ; PHILIPS & DU PONT OPTICAL (DE)) 26 July 1989 * abstract *	10,11, 15,17	H04N G11B
A	EP 0 529 834 A (PIONEER ELECTRONIC CORP) 3 March 1993 * figure 2 *	10,11, 15,17	
A	EP 0 331 417 A (PIONEER ELECTRONIC CORP; PIONEER VIDEO CORP (JP)) 6 September 1989		
A	EP 0 424 903 A (NIPPON ELECTRIC CO ; NIPPON DENKI HOME ELECTRONICS (JP)) 2 May 1991		
		-/--	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 26 November 1996	Examiner GIANNOTTI P.
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 (12/92) (P04001)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 95 30 0670

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	US 5 291 486 A (KOYANAGI HIDEKI) 1 March 1994		
A	US 5 280 572 A (CASE MICHAEL ET AL) 18 January 1994		
A	SID INTERNATIONAL SYMPOSIUM DIGEST OF PAPERS, BOSTON, MAY 17 - 22, 1992, no. VOL. 23, 17 May 1992, SOCIETY FOR INFORMATION DISPLAY, pages 127-129, XP000479005 MACINNIS A G: "THE MPEG SYSTEMS SPECIFICATION: MULTIPLEX, CODING, AND CONSTRAINTS"		
A	SIGNAL PROCESSING. IMAGE COMMUNICATION, vol. 4, no. 2, 1 April 1992, pages 153-159, XP000273161 MACINNIS A G: "THE MPEG SYSTEMS CODING SPECIFICATION"		
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 26 November 1996	Examiner GIANNOTTI P.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 (04.91) (PNC01)



European Patent Office

**CLAIMS INCURRING FEES**

The present European patent application comprised at the time of filing more than ten claims

- ☐ All claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and those claims for which fees have been  
namely claims:
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

**LACK OF UNITY OF INVENTION**

The Search Division considers that the present European patent application does not comply with the requirement of the unity of the invention and relates to several inventions or groups of inventions, namely:

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims
- ☐ Only part of the further claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respects of which search fees have been paid,  
namely claims:
- ☒ None of the further claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims,  
namely claims:



European Patent Office

EP 95 30 0670 - B -

**LACK OF UNITY OF INVENTION**

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions, or groups of inventions, namely:

1. Claims 1-17:  
Constructing and reproducing a data unit comprising a unit header, data blocks and data block headers
2. Claims 18-21:  
Apparatus for reproducing main picture data, sound data and sub-picture data in synchronism